# 1153-1 Heavy Duty 2" Wide General Purposes Caster (European Style) Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 200 x 50mm


EAN

TW-4115308001016

Rigid Caster with Stamping Fabricated Caster Fork Zine-Plated, Mounting Type - Top Plate, and included cover Cast Iron core with High-Quality Resilient Rubber Wheel Tread Bearings—Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 115mm

Bolt Hole Spacing 105 x 77.5mm

Plate Hole 13.5 x 11mm

Overall Height 240mm

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 205kgs

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

N/A

Electrical Conductivity

205kgs

307.5kgs

-20°C to +120°C

Rigid Caster

N/A

Electrical Conductivity

Anti-Static

N/A

Weight

2.00kgs

Standard

ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

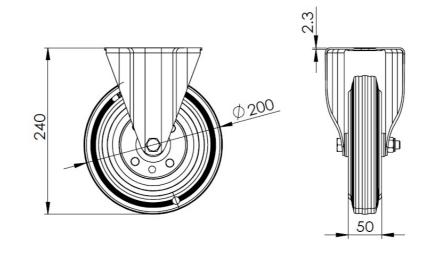

## Mounting

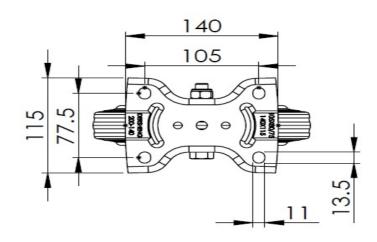

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.