

## PPR Series




Wheel Diameter x Wheel Width 100x 30mm

EAN

TW-412350400046

Easy to use, Non-Marking, Easy To Maneuver, and capable of handling heavy loads. Low rolling and Swivel Resistance, Resistant To many other aggressive substances.. Color: Pearlescent dark gray, with Plain Bearing

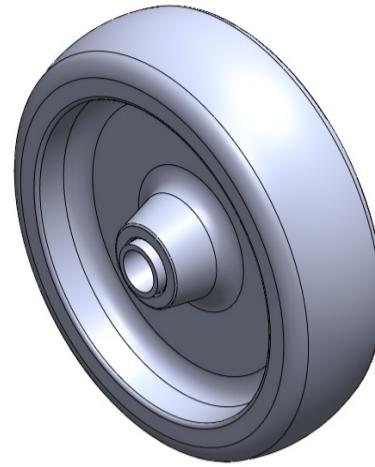

Wheel Tread: High-quality impact-resistant polypropylene

Wheel Center: Thermoplastic rubber elastomer

Bearing: mid-tube type

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter(D) 100mm

Wheel Width(T2) 30.5mm

Wheel Bearing Central Tube Type

Axe Bore(d) 10mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 39.5mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.162kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance ••••○

Operating Noise ••••○

Floor Surface Preservation •••••

## 2D Dimensional Drawing of Single Wheel

