

## PPR Series

Wheel Diameter x Wheel Width 200 x 50 mm


EAN

TW-412350800016

Easy to Floor Surface Preservation, Non-Marking, Easy To Maneuver, and capable of bearing heavy loads.

Low rolling and Swivel Resistance, Resistant To many other aggressive substances..

Color: Dark gray, with plastic T-sleeve

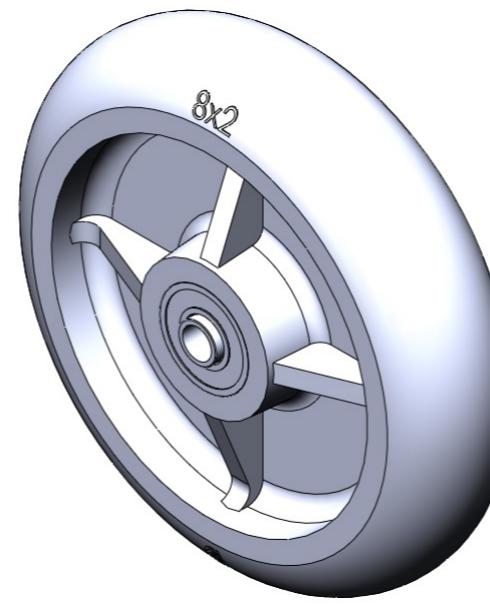

Wheel Tread: High-quality impact-resistant polypropylene

Wheel Center: Thermoplastic rubber elastomer

Bearing: ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter(D) 200mm

Wheel Width(T2) 50.8mm

Wheel Bearing Without Bearing

Axle Bore(d) 12.3mm

Axle Bore(S) mm

Bearing Bore Depth(t)

Hub Lenth(T1) 60.6mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.854kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance • • • • ○

Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

## 2D Dimensional Drawing of Single Wheel

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational [www.dersheng.com](http://www.dersheng.com)