

1129 Series

PPR wheel wheel diameter × wheel width 75 x 31mm


EAN

TW-4112903002003

Movable casters, riveted base and stamped tripod  
Surface plating, bottom plate mounting device  
Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel surface  
Dark grey, wheel bearing - precision ball.

Wheel surface: thermoplastic rubber elastomer (TPR)  
Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

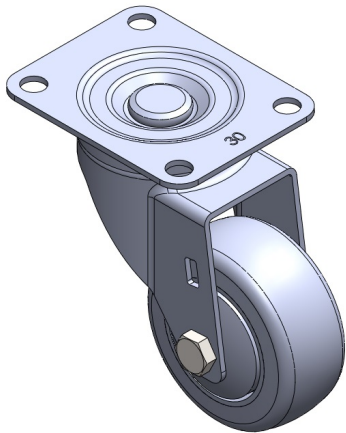

Picture may differ from original product


Technical Data

|                                                                        |                                   |
|------------------------------------------------------------------------|-----------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                   |
| Wheel Diameter                                                         | 75mm                              |
| Wheel Width                                                            | 31mm                              |
| Wheel Bearing                                                          | wheel equipped with ball bearings |
| Plate size                                                             | 91 x 72mm                         |
| Base plate hole spacing                                                | 72 x 53mm                         |
| Plate hole                                                             | 10mm                              |
| Offset                                                                 | 42.5mm                            |
| Swivel Interference                                                    | 160mm                             |
| Overall height                                                         | 114mm                             |
| Swivel Radius                                                          | 80mm                              |
| Hardness of tread                                                      | 82±5° Shore A                     |
| Load capacity (dynamic)                                                | 70kgs                             |
| Load capacity (static)                                                 | 105kgs                            |
| Temperature                                                            | -20°C to +60°C                    |
| Stand Style                                                            | activity                          |
| Stainless steel                                                        | N/A                               |
| Conductive                                                             | N/A                               |
| Anti                                                                   | N/A                               |
| Weight                                                                 | 0.6kgs                            |
| Standard                                                               | ISO22883                          |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

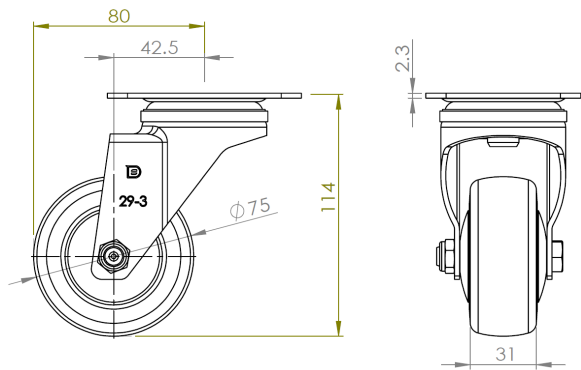

Mounting

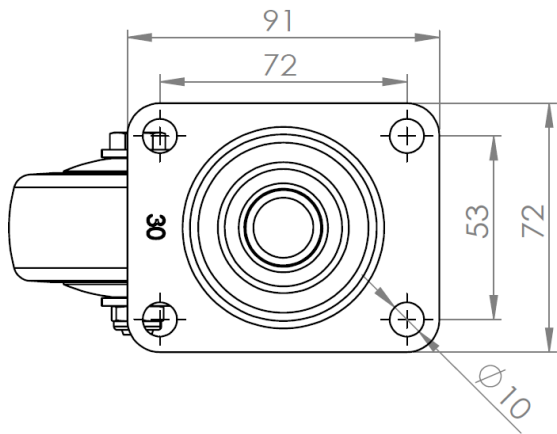

Drawings are for reference only and may differ from the product.

\* For any deviation between metric and imperial spec, please refer to the metric spec.