

## 1129 Series

W full effect wheel wheel diameter x wheel width 75 x 31mm


EAN

TW-4112903002012

Movable casters, riveted base and stamped tripod  
 Surface plating, bottom plate mounting device  
 Reinforced impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR)  
 wheel surface  
 Dark grey, wheel bearing - precision ball.

Wheel surface: thermoplastic rubber elastomer (TPR)  
 Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

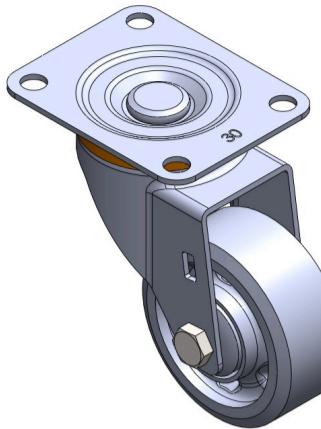

Picture may differ from original product


## Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	wheel equipped with ball bearings
Plate size	91 x 72mm
Base plate hole spacing	72 x 53mm
Plate hole	10mm
Offset	42.5mm
Swivel Interference	160mm
Overall height	114mm
Swivel Radius	80mm
Hardness of tread	72±5° Shore A
Load capacity (dynamic)	90kgs
Load capacity (static)	135kgs
Temperature	-20°C to +60°C
Stand Style	activity
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.6kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

## Dimensions

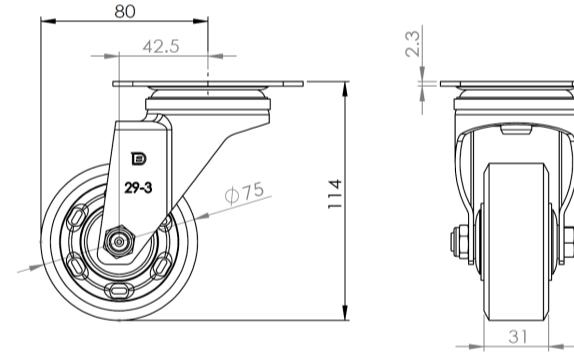

## Mounting

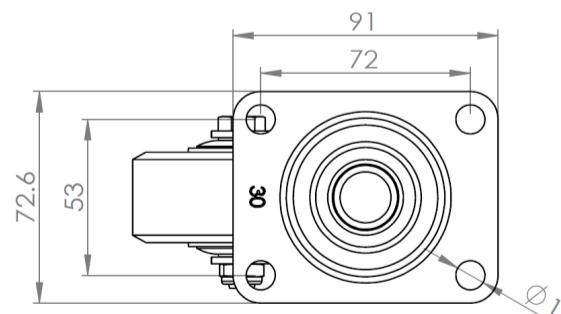

Drawings are for reference only and may differ from the product.