

1129 Series

PPR wheel wheel diameter x wheel width 75 x 31mm


EAN

TW-4112903002013

Movable casters, riveted stamped tripod with thread core—1/2"-12 threads
 Surface plating, threaded mounting device
 Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel surface
 Dark gray, wheel bearing - precision ball

Wheel surface: thermoplastic rubber elastomer (TPR)
 Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

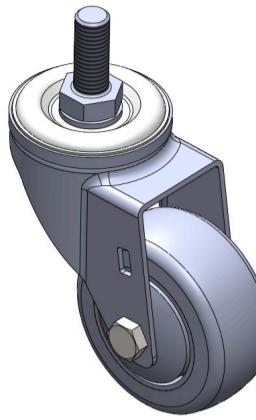

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	wheel equipped with ball bearings
Thread Specifications	1/2 " -12牙
Offset	42.5mm
Swivel Radius	160mm
Overall height	116mm
Swivel Radius	80mm
Hardness of tread	82±5° Shore A
Load capacity (dynamic)	70kgs
Load capacity (static)	105kgs
Temperature	-20°C to +60
Stand Style	activity
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.5kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	
Operating Noise	
Floor Surface Preservation	

Dimensions

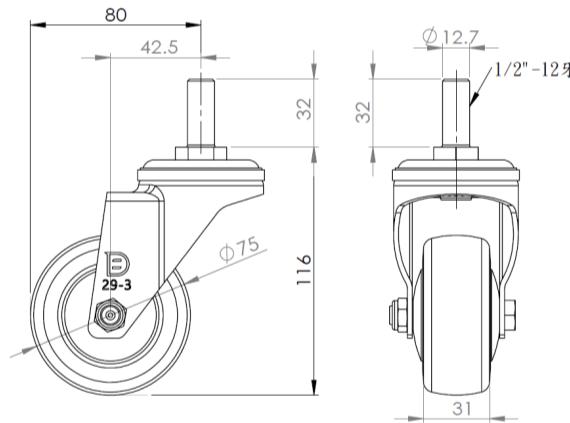

Mounting

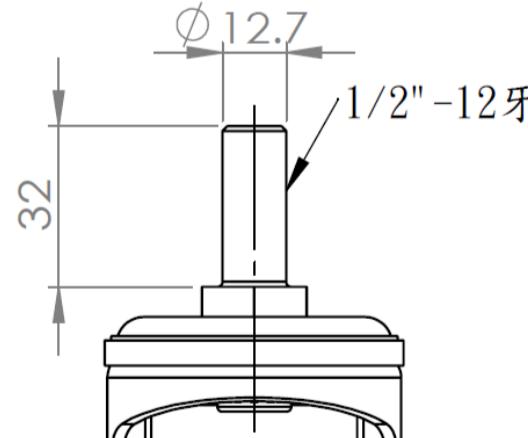

Drawings are for reference only and may differ from the product.