

## 1101 D Type Pneumatic Caster

Pneumatic (Black) Wheel Diameter x Wheel Width 216 x 65mm

YJ-11040800011032

Rigid Caster, Welded Caster Fork with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacings  
 Imitation gold plating, Top Plate (6T) Mounting Type  
 Cast Iron wheel center, High-Quality Resilient Rubber Wheel Tread with Compression  
 Resistance resistance and wear resistance  
 Black, Bearing—Ball Bearings.



Wheel tread: high-quality elastic rubber  
 Wheel Center: iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	216mm
Wheel Width	56mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Overall Height	246mm
Hardness Of Tread	75±5° Shore A
Load Capacity (Dynamic)	100kgs
Load Capacity (Static)	150kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.77kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	• • • • ○
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

### Dimensions

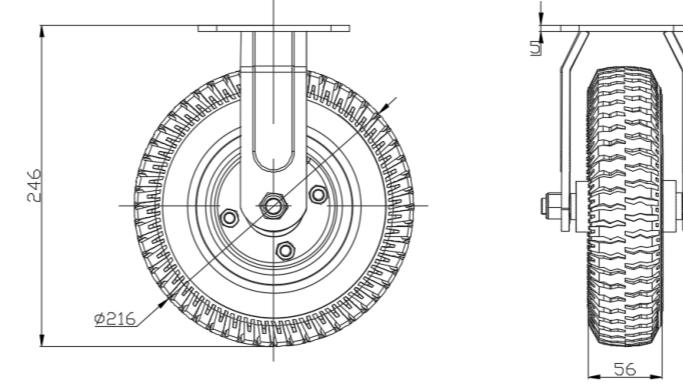

### Mounting

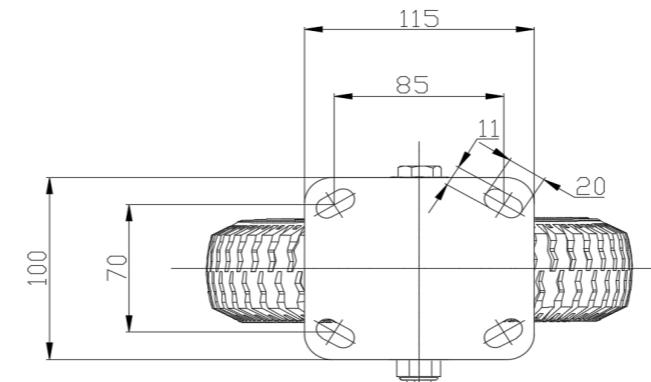

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International [www.dersheng.com](http://www.dersheng.com)