

1101 D Type Pneumatic Caster

Pneumatic (Black) Wheel Diameter x Wheel Width 216 x 65mm

YJ-11040800011473

Rigid Caster, Welded Caster Fork 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing
 Zinc-Plated, Top Plate (6T) Mounting Type system
 Cast Iron wheel center, High-Quality Resilient Rubber Wheel Tread; Wheel Tread provides
 Compression Resistance resistance and wear resistance
 Black, Bearing—Ball Bearings.

Wheel tread: high-quality elastic rubber
 Wheel Center: iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 216mm |
| Wheel Width | 56mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 115 x 100mm |
| Bolt Hole Spacing | 85 x 70mm |
| Plate Hole | 20 x 11mm |
| Overall Height | 246mm |
| Hardness Of Tread | 75±5° Shore A |
| Load Capacity (Dynamic) | 100kgs |
| Load Capacity (Static) | 150kgs |
| Temperature | -20°C to +70°C |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 2.77kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | • • • • ○ |
| Operating Noise | • • • • • |
| Floor Surface Preservation | • • • • • |

Dimensions

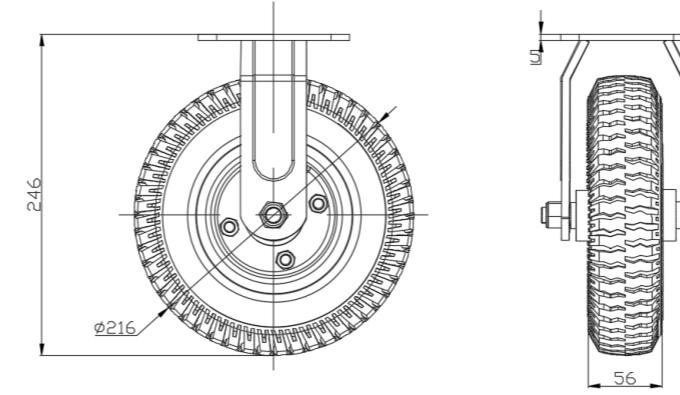

Mounting

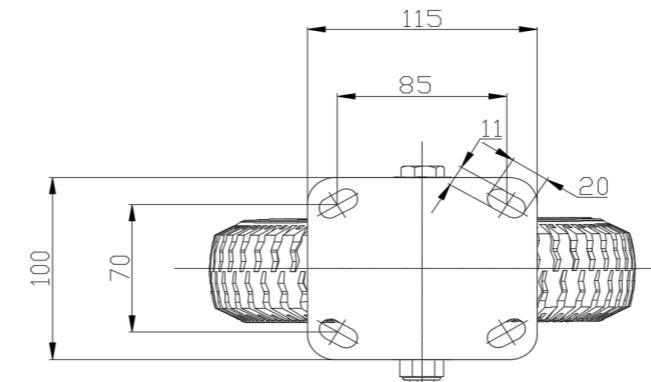

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com