

1109 Medium Duty/Low Profile Business Machine Caster Series




MRC (black) Wheel Diameter x Wheel Width 50 x 25 mm

EAN

YJ-11090200051013

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zinc-Plated, Mounting Type - Top Plate. Reinforced Polypropylene and tread. Black, Bearing—Ball Bearing.

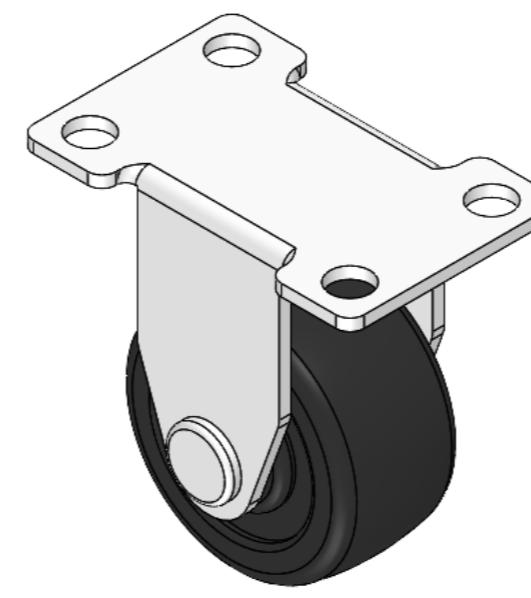

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

2 "

Wheel Width

1 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

2-13/16 " x 1-13/16 "

Bolt Hole Spacing

3/8 "

Plate Hole

2-13/16 "

Overall Height

2-13/16 "

Hardness Of Tread

75±5° Shore D

Load Capacity (Dynamic)

154lbs

Load Capacity (Static)

231lbs

Temperature

-4°F to +176°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

0.4lbs

Standard

ISO22883

Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



Dimensions

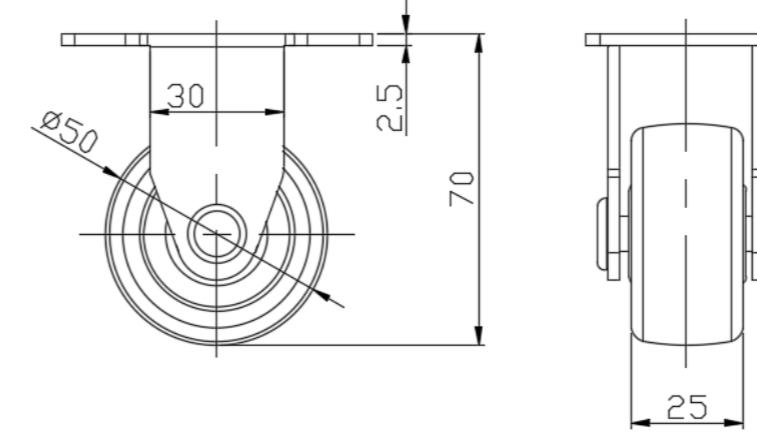

Mounting

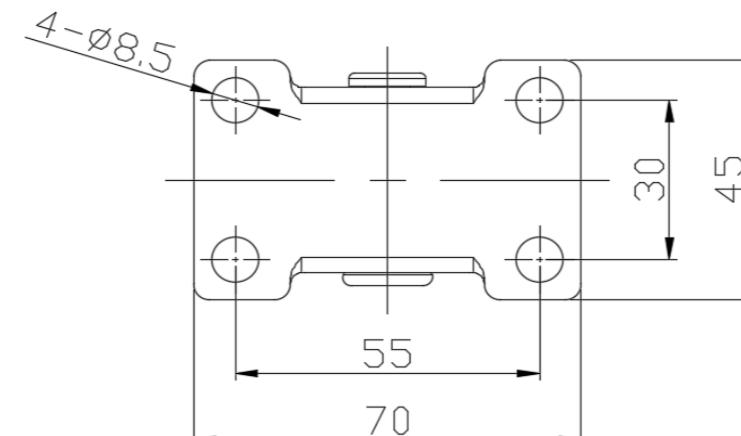

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com