

1109 Medium Duty/Low Profile Business Machine Caster Series




MRC (black) Wheel Diameter x Wheel Width 50 x 45mm

EAN

YJ-11090200051033

Rigid Caster, Welded footplate - high-grade hole Extended control lever surface, Mounting Type - Top Plate device Reinforced Polypropylene and Wheel Tread Black, Bearing - Ball Bearing.

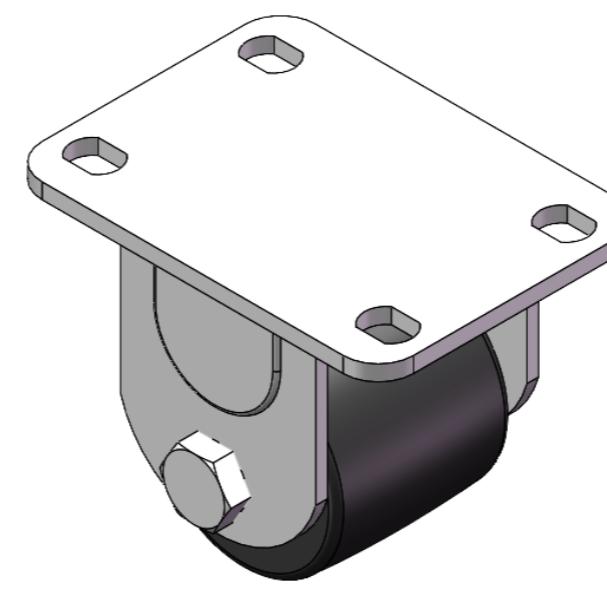

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

2 "

Wheel Width

1-13/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

3-13/16 " x 2-13/16 "

Bolt Hole Spacing

3 " x 1-13/16 "

Plate Hole

1/2 " x 23/64 "

Overall Height

3 "

Hardness Of Tread

75±5° Shore D

Load Capacity (Dynamic)

441lbs

Load Capacity (Static)

661lbs

Temperature

-4°F to +176°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

1.2lbs

Standard

ISO22883

Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



Dimensions

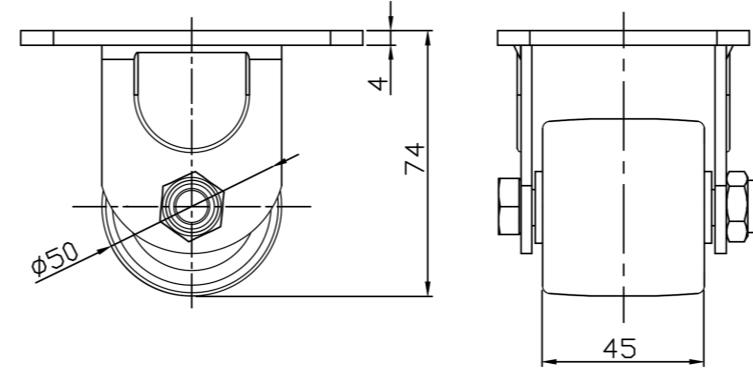

Mounting

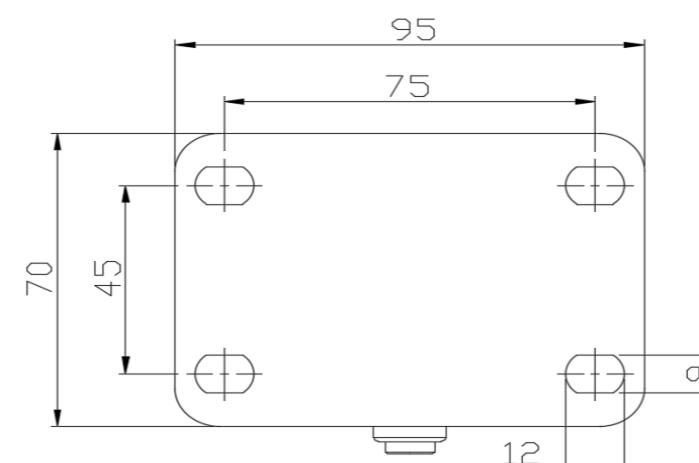

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com