

1109 Medium Duty/Low Profile Business Machine Caster Series



MRC (black) Wheel Diameter × Wheel Width 50 × 25 mm


EAN

YJ-11090200054013

Side Brake Locking system Top Plate Riveted and Stamping - High-Quality Hole Zine-Plated, Mounting Type - Top Plate Reinforced Polypropylene and tread Black, Bearing - Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: thermoplastic (PA6)

Drawings are for reference only and may differ from the product

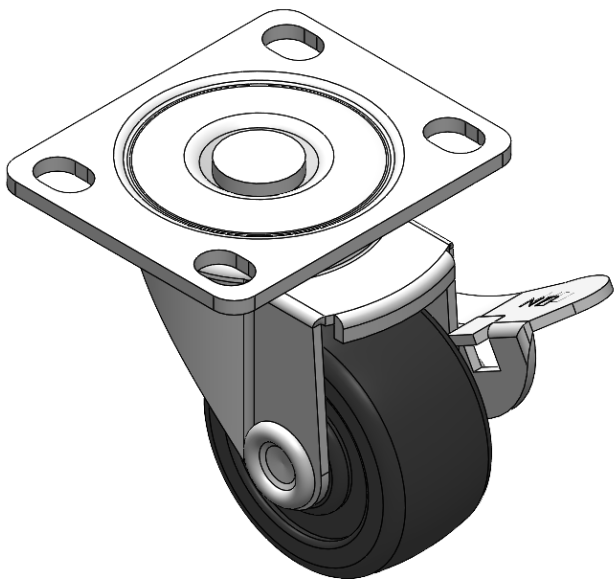

Picture may differ from original product


Technical Data

● Metric ○ Imperial	
Wheel Diameter	50mm
Wheel Width	25mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	70 x 58mm
Bolt Hole Spacing	55 x 39mm
Plate Hole	11.5 x 8.5mm
Offset	22.5mm
Swivel Interference	138mm
Overall Height	70mm
Swivel Radius	69mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.25kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

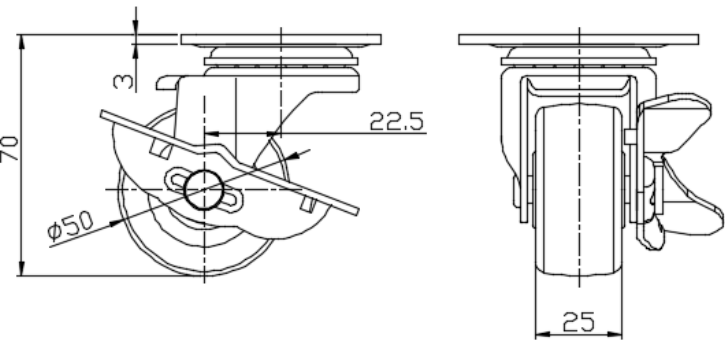

Mounting

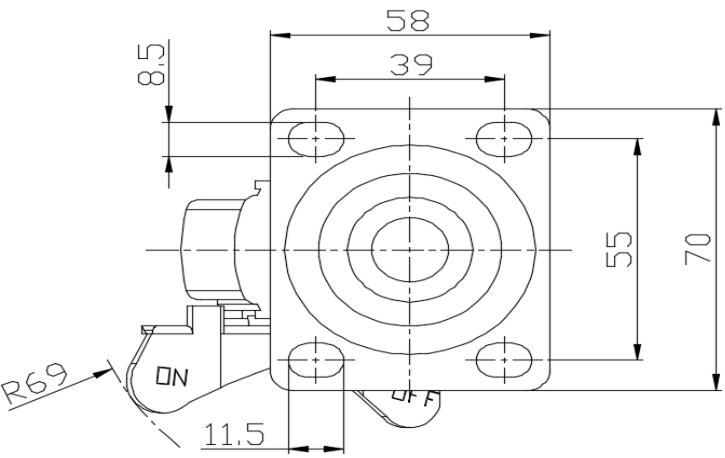

* For any deviation between metric and imperial spec, please refer to the metric spec.