

1109 Medium Duty/Low Profile Business Machine Caster Series



MRC (black) Wheel Diameter × Wheel Width 50 × 25 mm


EAN

YJ-11090200055053

Swivel Caster, thread-Riveted Stamping Fork—M10-P1.5 Zine-Plated, Mounting Type - Threaded Stem Thermoplastic core and tread Black, Bearing—Ball Bearing.

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

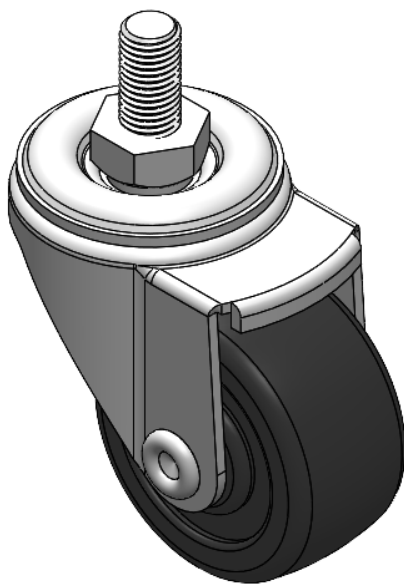

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	50mm
Wheel Width	25mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M10-P1.5
Threaded Size	19mm
Offset	22.5mm
Swivel Interference	94mm
Overall Height	72mm
Swivel Radius	47mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.24kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

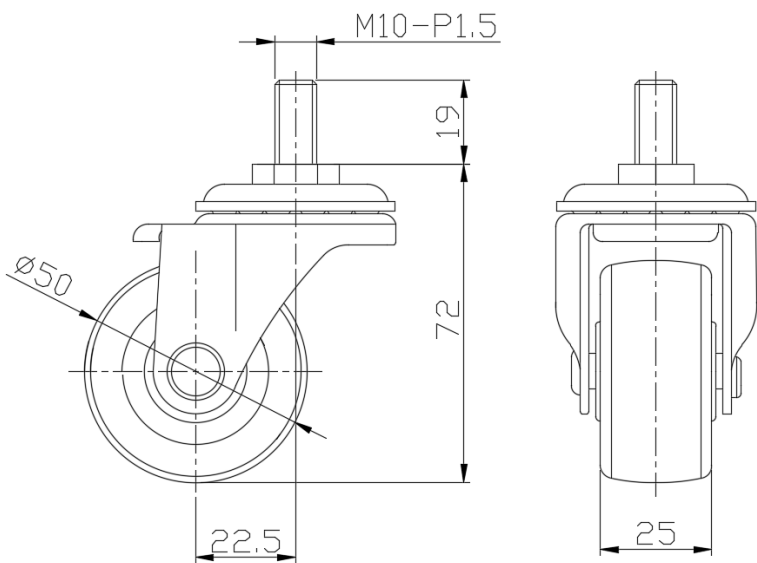

Mounting

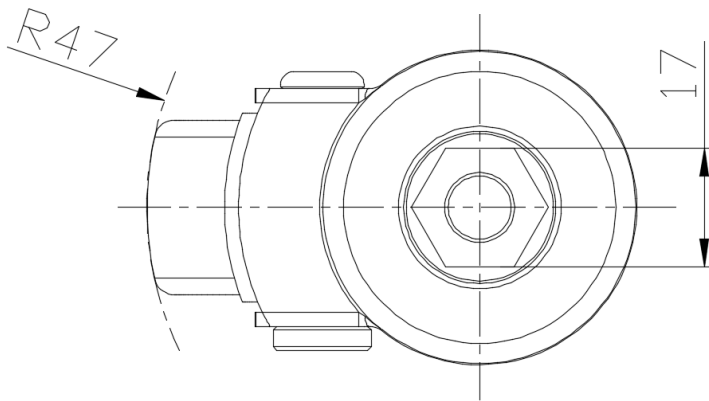

* For any deviation between metric and imperial spec, please refer to the metric spec.