


## 1109 Medium Duty/Low Profile Business Machine Caster Series

MRC (black) Wheel Diameter x Wheel Width 50 x 25 mm

EAN

YJ-11090200055083

Swivel Caster, thread-Riveted Stamping Fork—M10-P1.5 Zinc-Plated, Mounting Type - Threaded Stem Thermoplastic core and tread Black, Bearing—Ball Bearing.

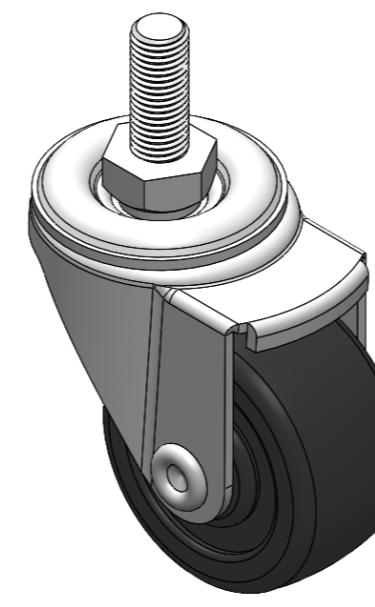Wheel Tread: Thermoplastic (PA6)  
Wheel Center: thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 50 mm

Wheel Width 25mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10-P1.5

Threaded Size 25mm

Offset 22.5mm

Swivel Interference 94mm

Overall Height 72mm

Swivel Radius 47mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.24kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

## Dimensions

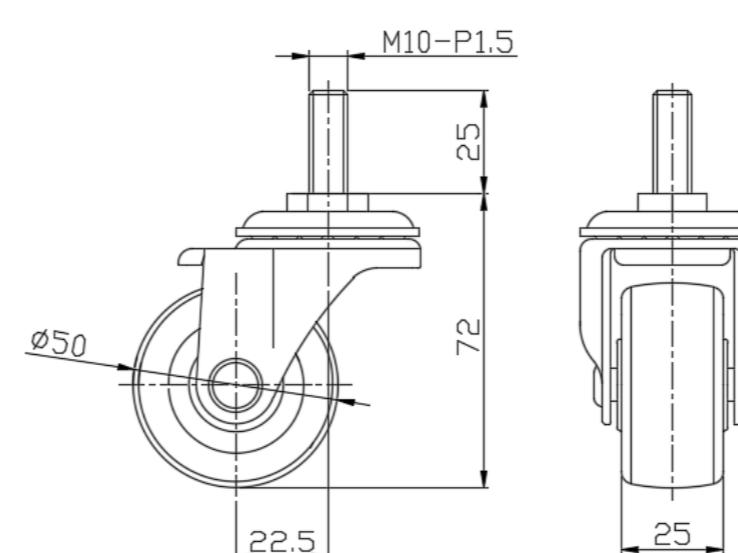

## Mounting

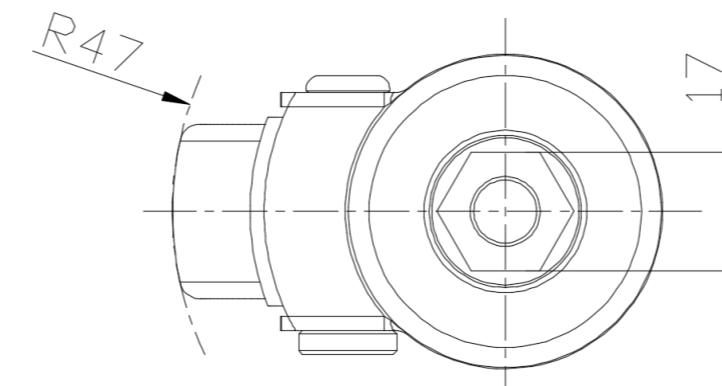

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com