


1109 Medium Duty/Low Profile Business Machine Caster Series

MRC (black) Wheel Diameter x Wheel Width 50 x 25 mm

EAN

YJ-11090200056053

Side Brake Locking system Thread-Riveted Stamping Fork – M10-P1.5 Zinc-Plated, Mounting Type - Threaded Stem Reinforced Polypropylene and tread Black, Bearing – Ball Bearing.

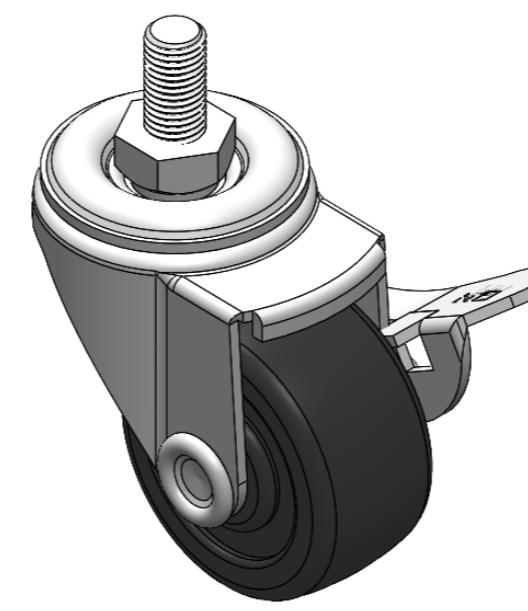

Wheel Tread: Thermoplastic (PA6)
Wheel Center: thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	25mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M10-P1.5
Threaded Size	19mm
Offset	22.5mm
Swivel Interference	128mm
Overall Height	72mm
Swivel Radius	64mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.27kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

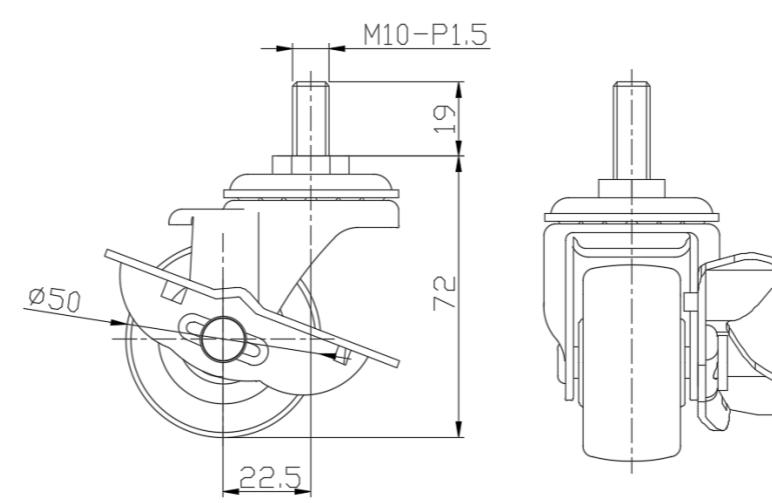

Mounting

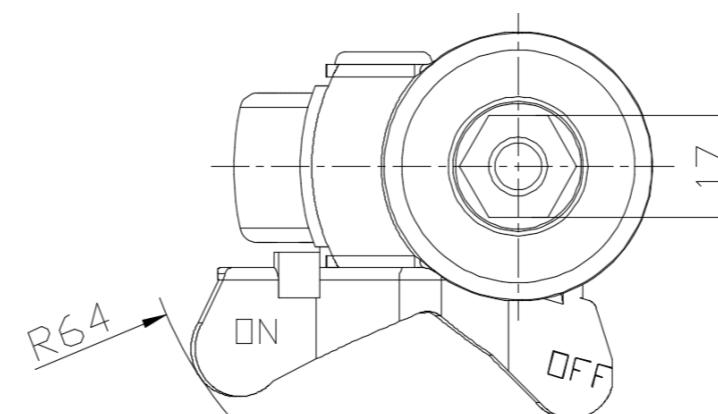

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com