

1109 Medium Duty/Low Profile Business Machine Caster Series



MRC (black) Wheel Diameter × Wheel Width 50 × 25 mm


EAN

YJ-11090200056063

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork – 3/8"-16 thread.
Zine-Plated, Mounting Type - Threaded Stem.
Reinforced Polypropylene Wheel Center and Wheel Tread.
Black. Bearings – Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

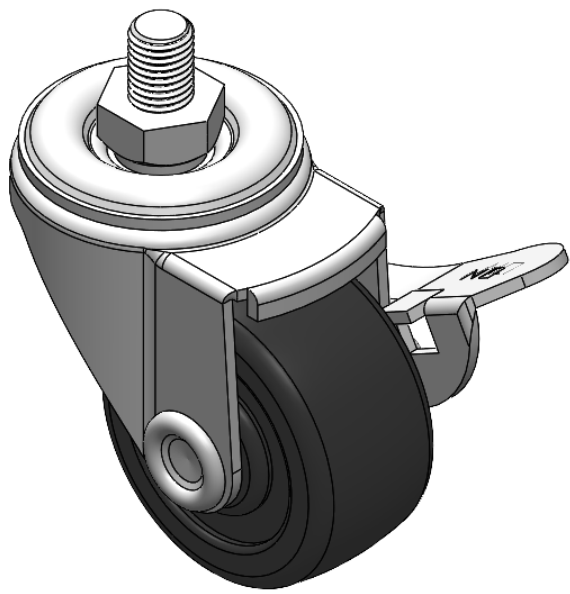

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	2 "
Wheel Width	1 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8 " -16牙
Threaded Size	1/2 "
Offset	15/16 "
Swivel Interference	5-1/16 "
Overall Height	2-7/8 "
Swivel Radius	2-9/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.6lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

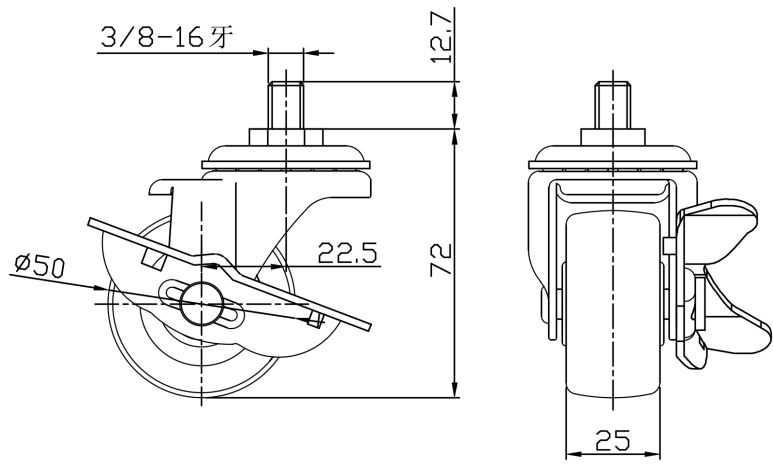

Mounting

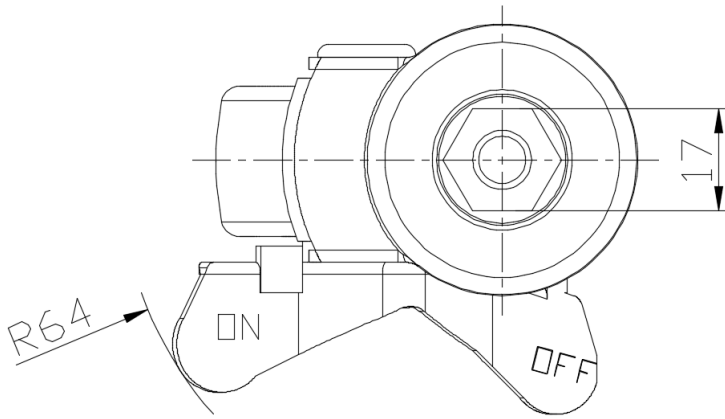

* For any deviation between metric and imperial spec, please refer to the metric spec.