


## 1109 Medium Duty/Low Profile Business Machine Caster Series

Anti-static QPU (Iron Black) Wheel Diameter x Wheel Width 50x45 mm

EAN

YJ-11090200535023

Swivel Caster with Riveted Stamping Fork—3/8"-16UNC Zinc-Plated, Mounting Type - Threaded Stem Cast Iron Wheel Center, High Quality Polyurethane tread Black, Bearing—Ball Bearing.

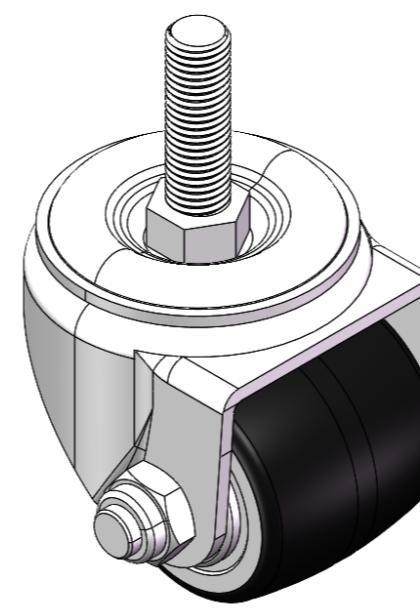

Wheel Tread: high quality polyurethane  
Wheel Center: iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	50mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8" -16UNC
Threaded Size	38mm
Offset	19mm
Swivel Interference	96mm
Overall Height	70mm
Swivel Radius	48mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	100kgs
Load Capacity (Static)	150kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	$Y 10^6 \sim 10^9 \Omega$
Weight	0.84kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

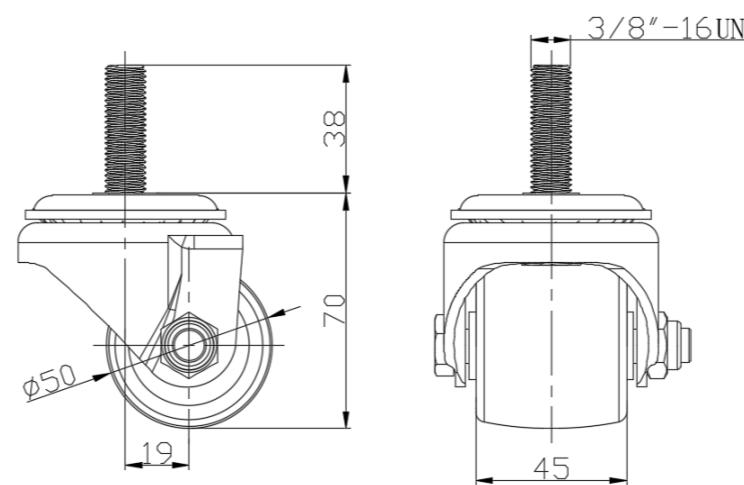

## Mounting

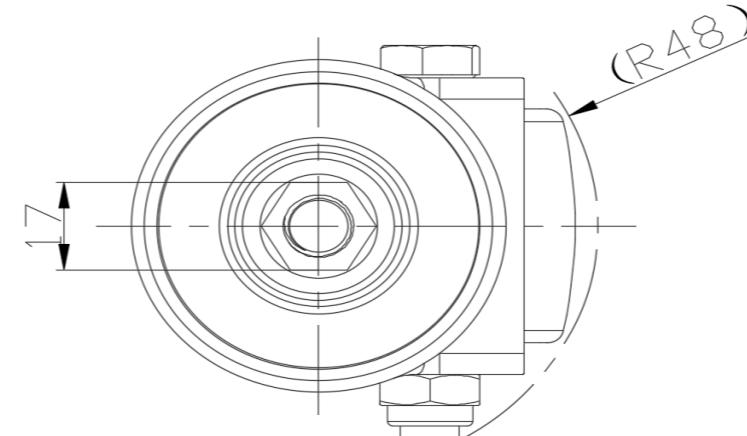

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com