1109 Medium Duty/Low Profile Business Machine Caster Series

Dersheng Casters Keep Rolling

ZQPU (Milled Blue) Wheel Diameter × Wheel Width 50× 20 (41.5) mm


EAN

YJ-11090200802073

Swivel Caster with Riveted Fork and Stamping Fork -75×45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane tread Blue color, Bearing - Ball Bearing

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 2 "

Wheel Width 1-11/16

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

...

Offset 3/4 "

Swivel Interference 4-5/16 "

Overall Height 3 "

Swivel Radius 2-3/16 "
Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Fork Type Swivel Constant Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 1.8lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

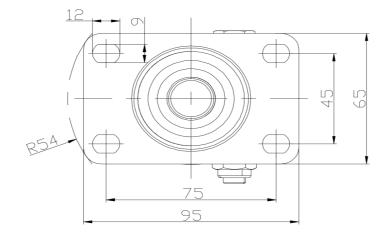

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.