# 1109 Medium Duty/Low Profile Business Machine Caster Series

Dersheng Casters Keep Rolling

ZQPU (Milled Blue) Wheel Diameter × Wheel Width 50× 20 (41.5) mm


EAN

YJ-11090200805013

Swivel Caster, thread-Riveted Stamping Fork—M16-P2 Zine-Plated, Mounting Type - Threaded Stem Cast Iron Wheel Center, High Quality Polyurethane tread Blue color, Bearing—Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 2 "

Wheel Width 1-11/16

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 1 "

Offset 11/16 "

Swivel Interference 3-11/16 "

Overall Height 3-1/16 "

Swivel Radius 1-7/8 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.5lbs

Standard


ISO22883

### Advantages at a glance


Rolling Resistance
Operating Noise

Floor Surface Preservation • • • • •

#### Dimensions

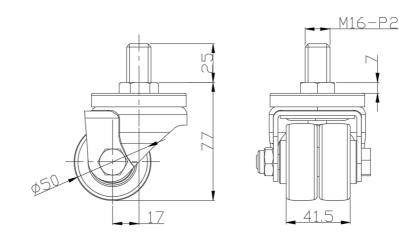

## Mounting

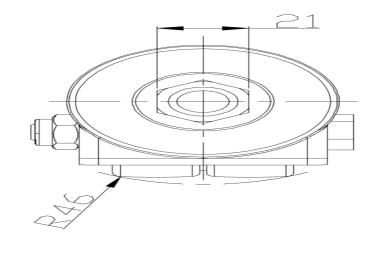

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.