

1109 Medium Duty/Low Profile Business Machine Caster Series



Anti-static ZQPU Wheel (milling black) Wheel Diameter x Wheel Width 50 x 20 (41.5) mm


EAN

YJ-11090200805033

Portable Casters, Threaded Stem Stamping Fork—3/8"-16UNC
Zinc-Plated, Mounting Type - Threaded Stem hardware
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread
Black, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

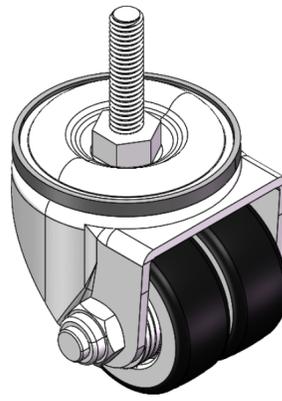

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	2 "
Wheel Width	1-11/16 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8 " -16UNC
Threaded Length	1-1/2 "
Offset	11/16 "
Swivel Interference	3-3/4 "
Overall Height	2-13/16 "
Swivel Radius	1-7/8 "
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	220lbs
Load Capacity (Static)	331lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	Y 10 ⁶ /~10 ⁹ /Ω
Weight	2.1lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

Dimensions

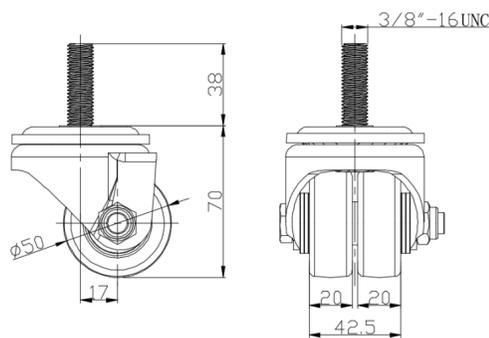

Mounting

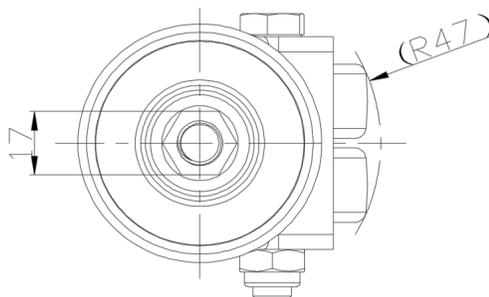

* For any deviation between metric and imperial spec, please refer to the metric spec.