1109 Medium Duty/Low Profile Business Machine Caster Series

Dersheng Casters Keep Rolling

MRC (black) Wheel Diameter × Wheel Width 50 × 25 mm


EAN

YJ-11090210055023

Swivel Caster with Riveted Stamping Fork - 3/8" - 16 UNC Zine-Plated, Mounting Type - Threaded Stem Reinforced Polypropylene core and Wheel Tread Black, Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 2 "
Wheel Width 1 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8 " -16牙
Threaded Size 3/4 "
Offset 15/16 "
Swivel Interference 3-3/4 "
Overall Height 2-7/8 "
Swivel Radius 1-7/8 "

Hardness Of Tread 75±5° Shore D
Load Capacity (Dynamic) 154lbs

Load Capacity (Static)

Temperature

-4°F to +176°F

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.5lbs


Standard ISO22883

Advantages at a glance


Rolling Resistance
Operating Noise

Floor Surface Preservation $\bullet \bullet \circ \circ \circ$

Dimensions

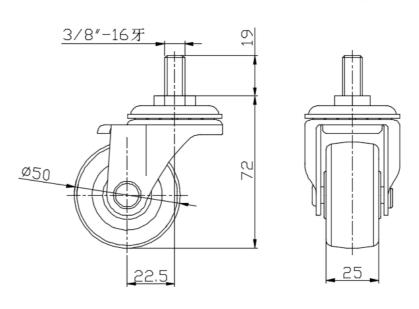

Mounting

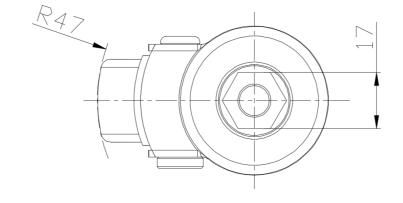

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.