1109 Medium Duty/Low Profile Business Machine Caster Series



MRC (black) Wheel Diameter × Wheel Width 64 x 45mm


EAN

YJ-11090250055043

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Zine-Plated, Mounting Type - Threaded Stem Thermoplastic core and tread Bearing—Ball Bearing.

Wheel surface: Thermoplastic (PA6) Wheel Center: thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 64mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 28.5mm

Swivel Interference 126mm

Overall Height 87.5mm

Swivel Radius 63mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.63kgs

Standard

ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• 0 0 0

Floor Surface Preservation $\bullet \bullet \circ \circ \circ$

Dimensions

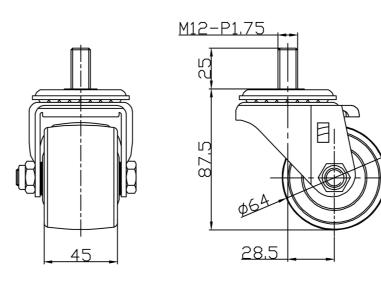

Mounting

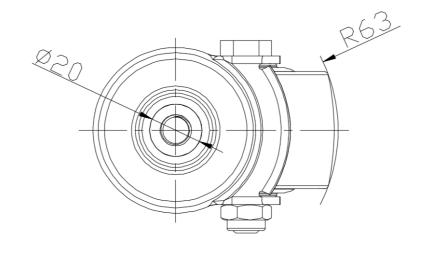

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.