

1109 Medium Duty/Low Profile Business Machine Caster Series



MRC (black) Wheel Diameter × Wheel Width 64 x 45mm


EAN

YJ-11090250055043

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Zine-Plated, Mounting Type - Threaded Stem Thermoplastic core and tread Bearing—Ball Bearing.

Wheel surface: Thermoplastic (PA6)  
Wheel Center: thermoplastic (PA6)

Drawings are for reference only and may differ from the product

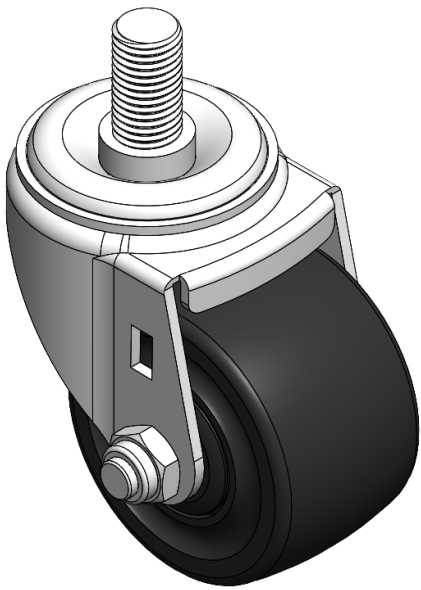

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 2-9/16                    |
| Wheel Width                                                            | 1-13/16 "                 |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Threaded Stem                                                          | M12-P1.75                 |
| Threaded Size                                                          | 1 "                       |
| Offset                                                                 | 1-1/8 "                   |
| Swivel Interference                                                    | 5 "                       |
| Overall Height                                                         | 3-1/2 "                   |
| Swivel Radius                                                          | 2-1/2 "                   |
| Hardness Of Tread                                                      | 75±5° Shore D             |
| Load Capacity (Dynamic)                                                | 551lbs                    |
| Load Capacity (Static)                                                 | 827lbs                    |
| Temperature                                                            | -4°F to +176°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 1.4lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

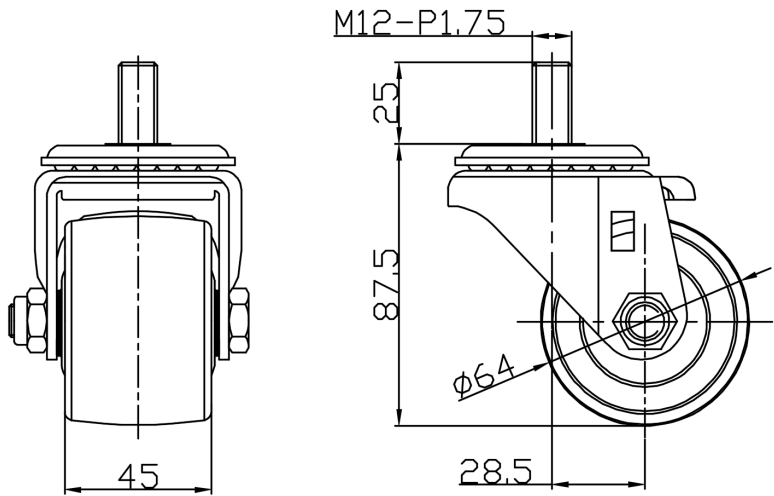

Mounting

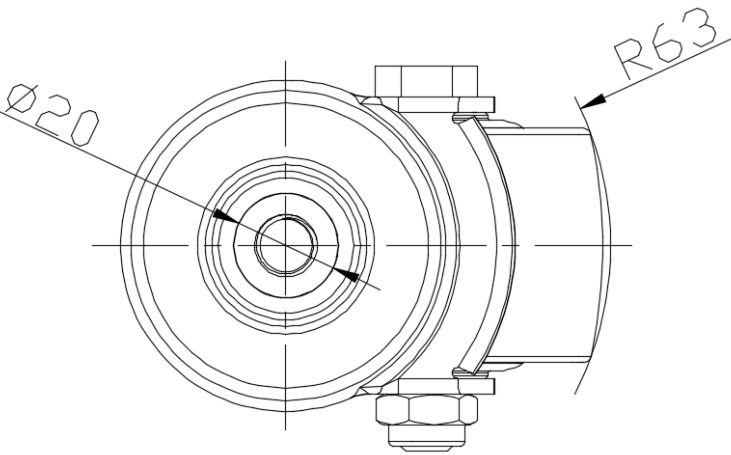

\* For any deviation between metric and imperial spec, please refer to the metric spec.