

## 1109 Medium Duty/Low Profile Business Machine Caster Series




QPU (brown round) Wheel Diameter x Wheel Width 62.5 x 45mm

EAN

YJ-11090250531023

Rigid Caster, Welded-on foot with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zinc-Plated, Mounting Type - Top Plate Steel core, High Quality Polyurethane tread Brown, Bearing—Ball Bearing.

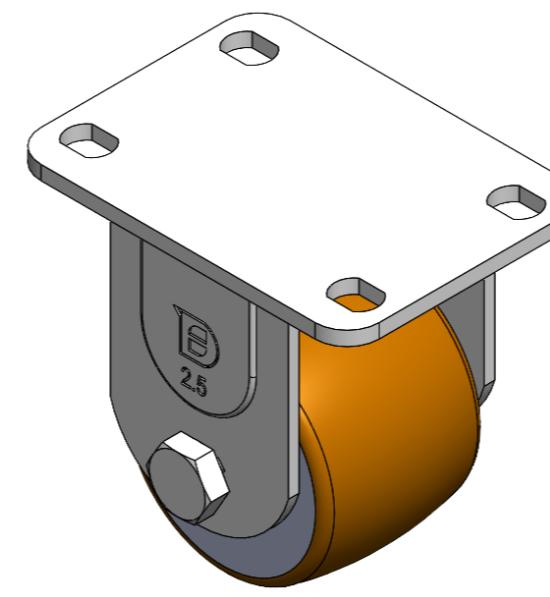

Wheel surface: high quality polyurethane

Wheel Center: iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	62.5mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	95 x 70mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Overall Height	90mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.9kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

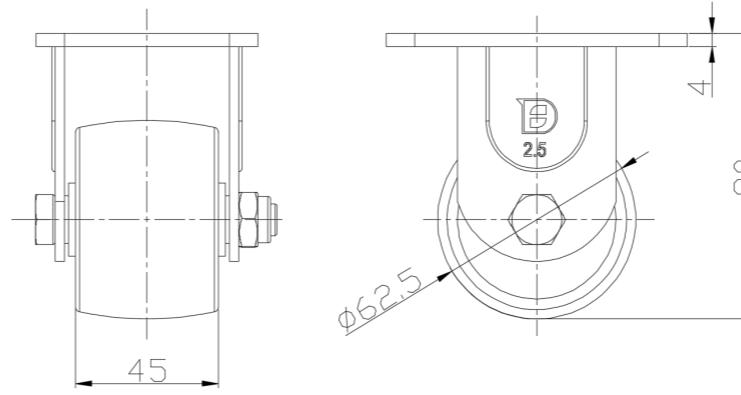

## Mounting

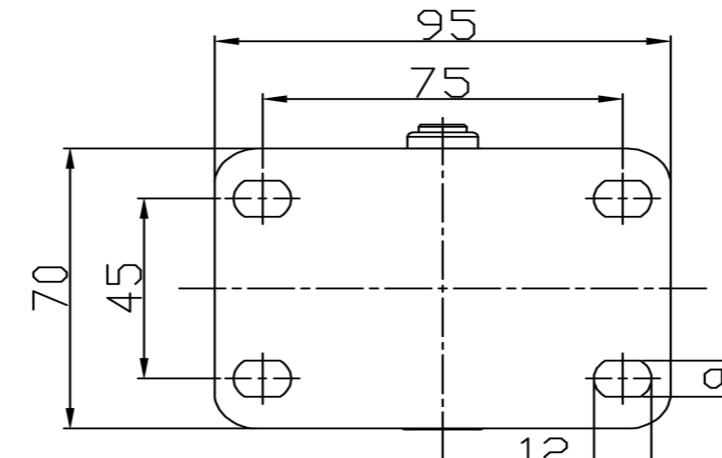

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com