1109 Medium Duty/Low Profile Business Machine Caster Series



ZQPU (Milled Blue) Wheel Diameter × Wheel Width 62.5× 20 (41.5) mm

EAN


YJ-11090250802013

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Fork-mount Mounting Type Aluminum Wheel Center, High Quality Polyurethane tread Blue color, Bearing—Ball Bearing.

Wheel surface: high quality polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 62.5mm
Wheel Width 41.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 65mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 12 x 9mm Offset 28.5mm Swivel Interference 124mm Overall Height 90mm **Swivel Radius** 62mm Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 400kgs
Load Capacity (Static) 600kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.2kgs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

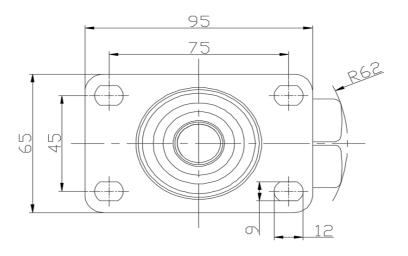

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.