

1109 Medium Duty/Low Profile Business Machine Caster Series

MRC (black) Wheel Diameter x Wheel Width 75 x 45 mm


EAN

YJ-11090300056933

Side Brake Locking system Thread-Riveted Stamping Fork – M16-P2 Zinc-Plated, Mounting Type - Threaded Stem Reinforced Polypropylene and tread Black, Bearing – Ball Bearing.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

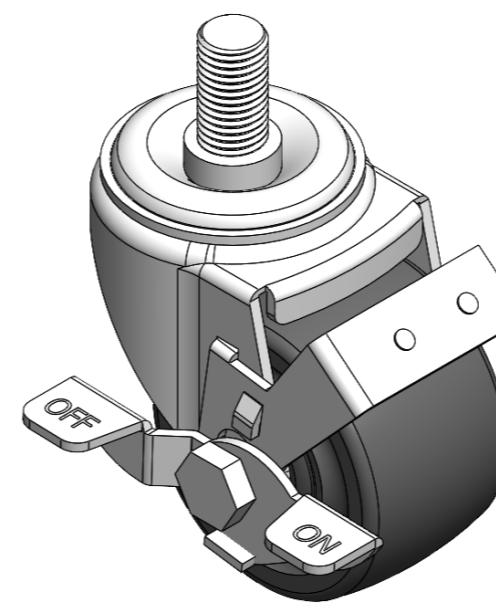

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	75mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M16-P2
Threaded Size	29mm
Offset	31mm
Swivel Interference	174mm
Overall Height	98.5mm
Swivel Radius	87mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.81kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

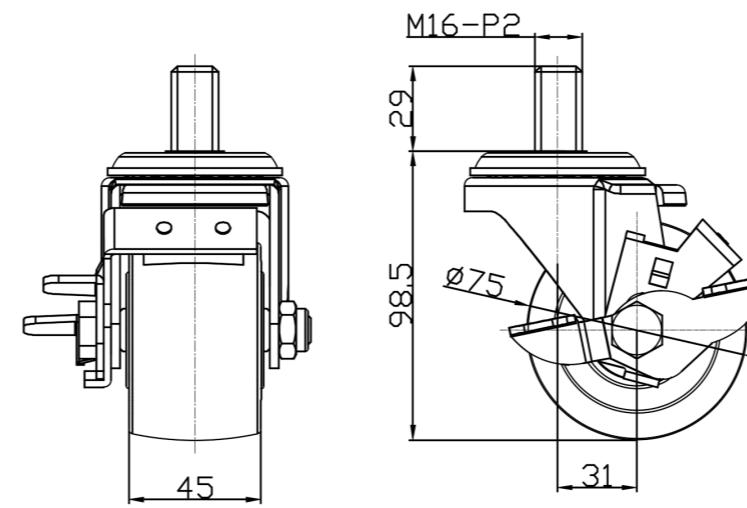

Mounting

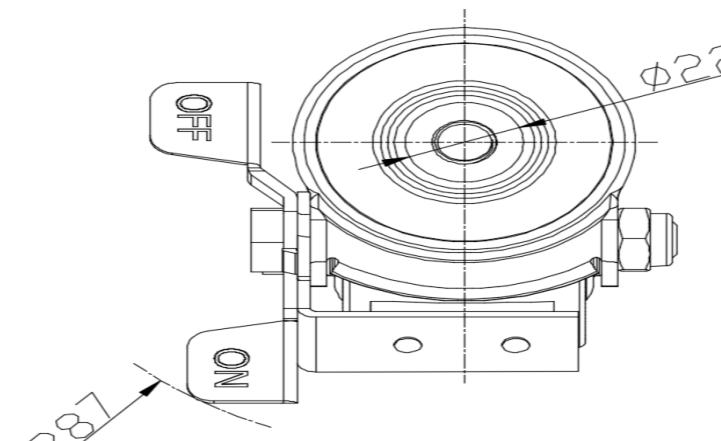

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com