1109 Medium Duty/Low Profile Business Machine Caster Series

Dersheng Casters Keep Rolling

MRC (black) Wheel Diameter × Wheel Width 75 x 45 mm


EAN

YJ-11090300056943

Side Brake Locking system Thread-Riveted Stamping Fork—M12-P1.75. Zine-Plated, Mounting Type - Threaded Stem. Reinforced Polypropylene and tread. Black. Bearing—Ball Bearing.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 1"

Offset 1-1/4"

Swivel Interference 7"

Overall Height 3-15/16"

Swivel Radius 3-1/2"

Swivel Radius 3-1/2 "
Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.8lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

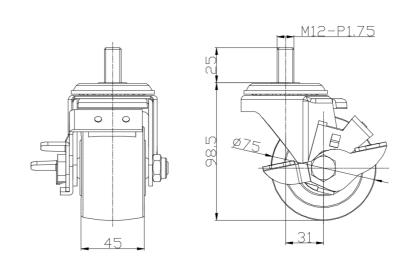

Mounting

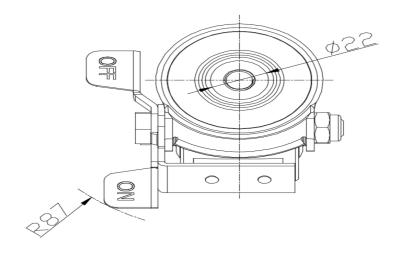

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.