# 1109 Medium Duty/Low Profile Business Machine Caster Series



QPU (brown round) Wheel Diameter × Wheel Width 75 × 45mm

EAN


YJ-11090300534013

Side Brake Locking system High-quality, Riveted Stamping Fork. Hole Zine-Plated, Mounting Type - Top Plate. Cast Iron Wheel Center, High Quality Polyurethane tread. Brown color, Bearing—Ball Bearing.

Wheel surface: high quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 104 x 80mm **Bolt Hole Spacing** 81 x 59mm Plate Hole 12 x 9mm Offset 31mm Swivel Interference 174mm Overall Height 102mm **Swivel Radius** 87mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.49kgsStandardISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

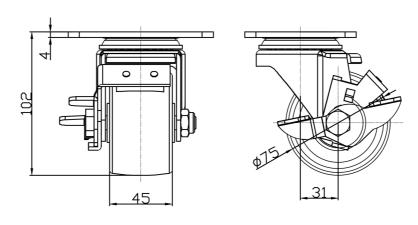

## Mounting

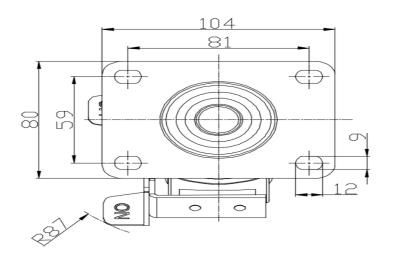

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.