


1165-6 AMR/AGV- 6 Pressed Steel Caster - Dual Wheel Series
(Medium/Light Duty)

ZQPU wheel (milling blue) wheel diameter x wheel width 75x20 (41.5) mm

EAN

YJ-11090300802023

Swivel Caster with Riveted Fork and Stamping Fork – 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing
Zinc-Plated, Mounting Type - Top Plate
Cast Iron core, High Quality Polyurethane Wheel Tread
Blue color, Bearing – Ball Bearings

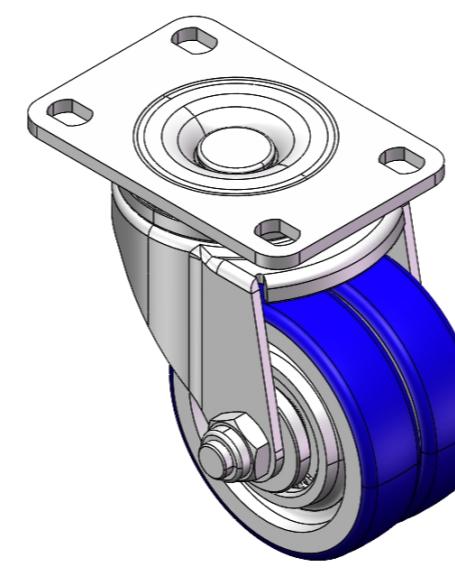

Wheel tread: high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	3 "
Wheel Width	1-11/16
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-13/16 " x 2-9/16 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	1/2 " x 23/64 "
Offset	1-5/16 "
Swivel Interference	5-9/16 "
Overall Height	4-1/16 "
Swivel Radius	2-13/16 "
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	661lbs
Load Capacity (Static)	992lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

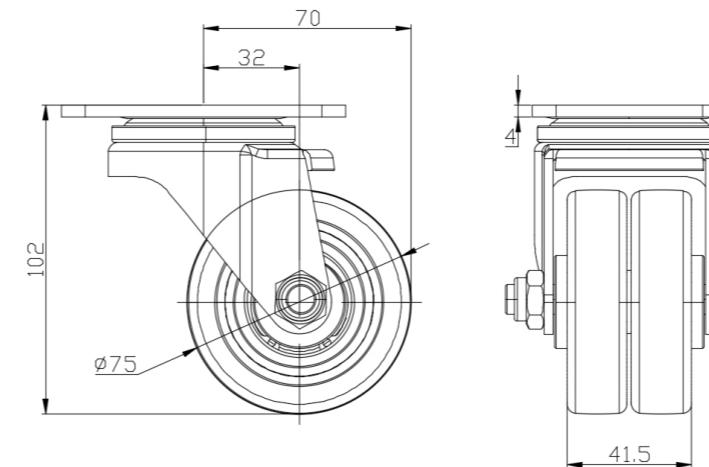

Mounting

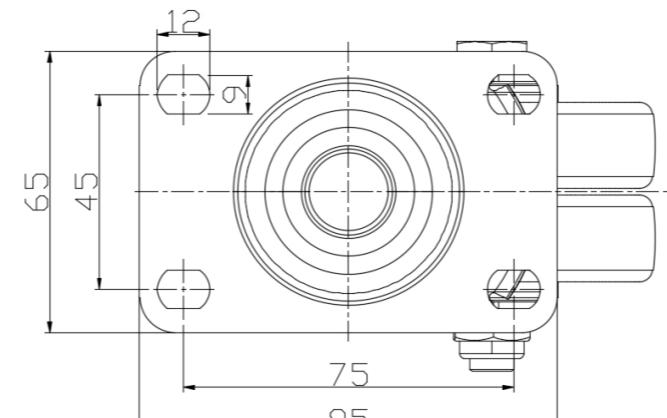

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com