

1110-2 Light Duty Wire & Shelving/Display Series



PU (black transparent) Wheel Diameter × Wheel Width 48 × 23.5mm

EAN

YJ-11100200952014

Swivel Caster with Riveted Fork and Stamping Fork with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacings.
Electroplated surface, Mounting Type - Top Plate.
Polypropylene core with High Quality Polyurethane Wheel Tread.
Translucent black finish. Bearings: Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	48mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	50 x 50mm
Bolt Hole Spacing	35 x 35mm
Plate Hole	12 x 6.1mm
Offset	20mm
Swivel Interference	88mm
Overall Height	67mm
Swivel Radius	44mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.18kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

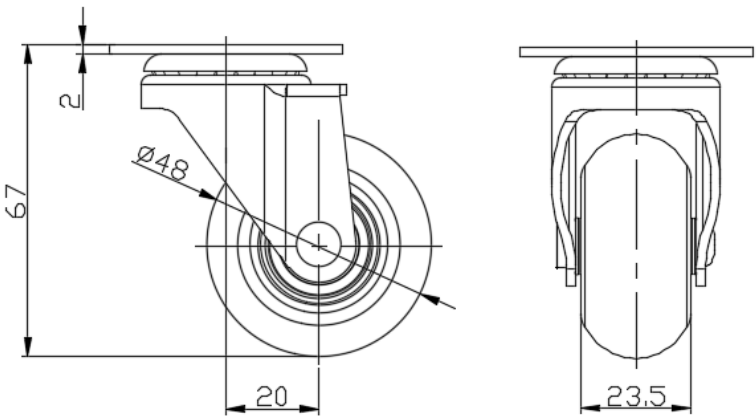

Mounting

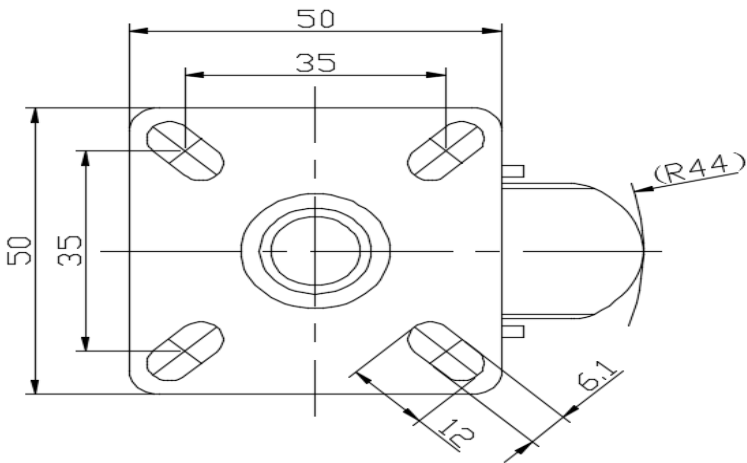

* For any deviation between metric and imperial spec, please refer to the metric spec.