## 1110-2 Light Duty Wire & Shelving/Display Series

Dersheng Casters Keep Rolling

PU (black transparent) Wheel Diameter × Wheel Width 48 × 23.5mm

EAN


YJ-11100200955013

Swivel Caster, thread-Riveted Stamping Fork—M8-P1.25 Zine-Plated, Mounting Type - Threaded Stem Polypropylene core, High Quality Polyurethane Wheel Tread Translucent black, Bearing—Ball Bearings.

Wheel surface: high quality polyurethane

Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 1-15/16 "
Wheel Width 15/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.25

Threaded Size 5/8 "

Offset 13/16 "

Swivel Interference 1-3/4 "

Overall Height 2-11/16 "

Swivel Radius 3-1/2 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 66lbs

Load Capacity (Static) 99lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.4lbs

Standard

ISO22883

## Advantages at a glance


Rolling Resistance

**Operating Noise** 


. . . . .

Floor Surface Preservation • • • • •

## Dimensions

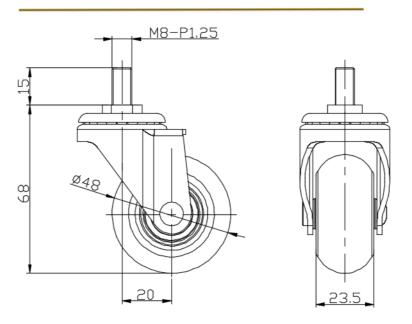

Mounting

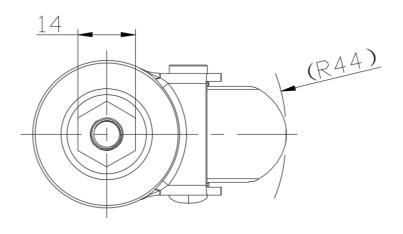

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.