

1110-2 Light Duty Wire & Shelving/Display Series



PU (black transparent) Wheel Diameter × Wheel Width 48 × 23.5mm


EAN

YJ-11100200957014

Swivel Caster with Riveted Stamping Fork—Ø11x22L
Electroplated surface, Mounting Type - Cylindrical Stem with brass buckle
Polypropylene core, High Quality Polyurethane Wheel Tread
Translucent black finish, Bearing—Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

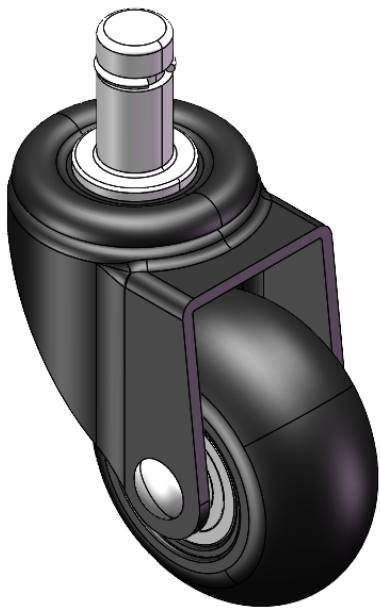

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	48mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Diameter	11mm
Stem Hole Spec	22mm
Offset	20mm
Swivel Interference	88mm
Overall Height	68mm
Swivel Radius	44mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.17kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

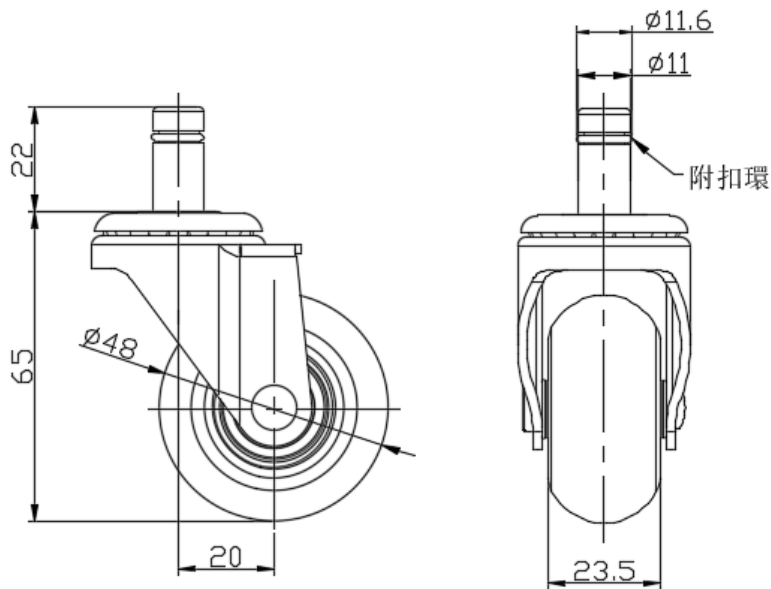

Mounting

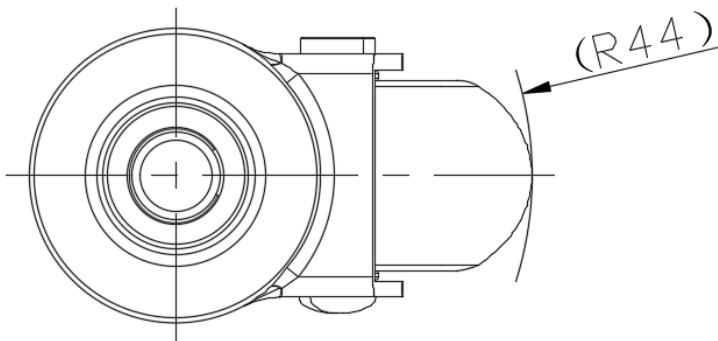

* For any deviation between metric and imperial spec, please refer to the metric spec.