

1110-2 Light Duty Wire & Shelving/Display Series



PU (black transparent) Wheel Diameter × Wheel Width 48 × 23.5mm


EAN

YJ-11100200958014

Casters with a Wheel Brake With locking system. Stamping, Riveted Fork—Ø11x22L. Electroplated surface, Mounting Type - Cylindrical Stem with brass buckle. Polypropylene core, High Quality Polyurethane Wheel Tread. Translucent black finish. Bearings—Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

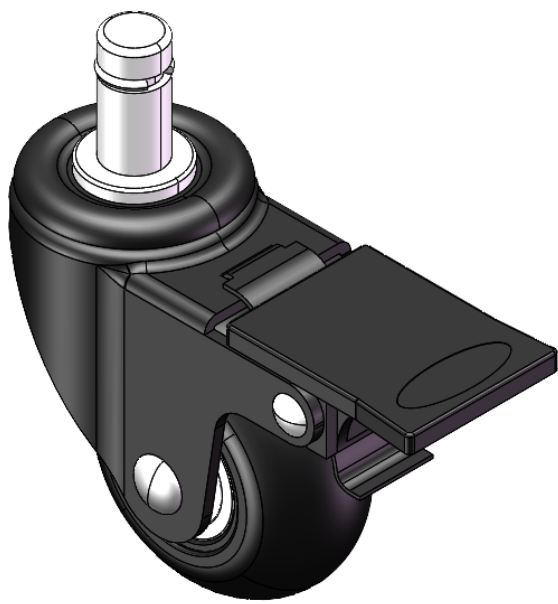

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	48mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Diameter	11mm
Stem Hole Spec	22mm
Offset	20mm
Swivel Interference	146mm
Overall Height	65mm
Swivel Radius	73mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.19kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

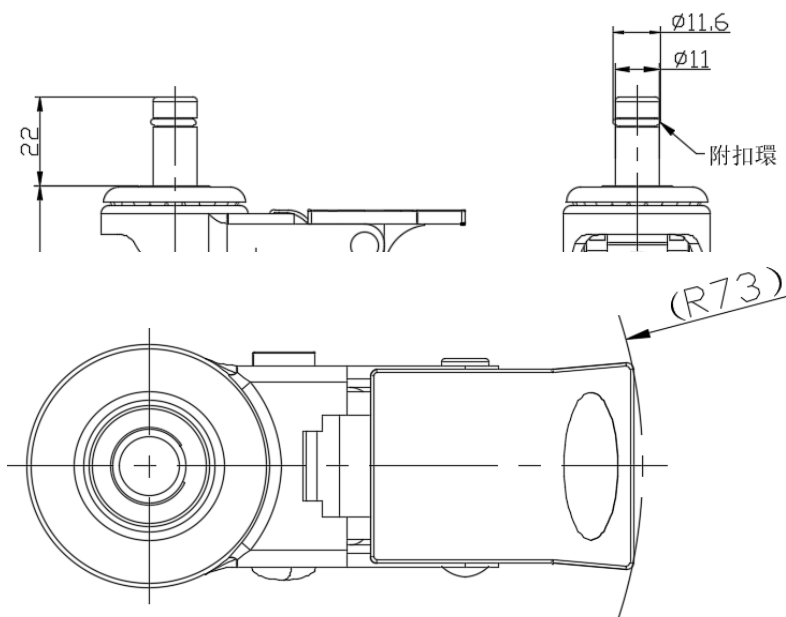

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.