



1110-2 Light Duty Wire & Shelving/Display Series

PU (black transparent) Wheel Diameter × Wheel Width 48 × 23.5mm


EAN

YJ-11100200958014

Casters with a Wheel Brake With locking system. Stamping, Riveted Fork—Ø11x22L. Electroplated surface, Mounting Type - Cylindrical Stem with brass buckle. Polypropylene core, High Quality Polyurethane Wheel Tread. Translucent black finish. Bearings—Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

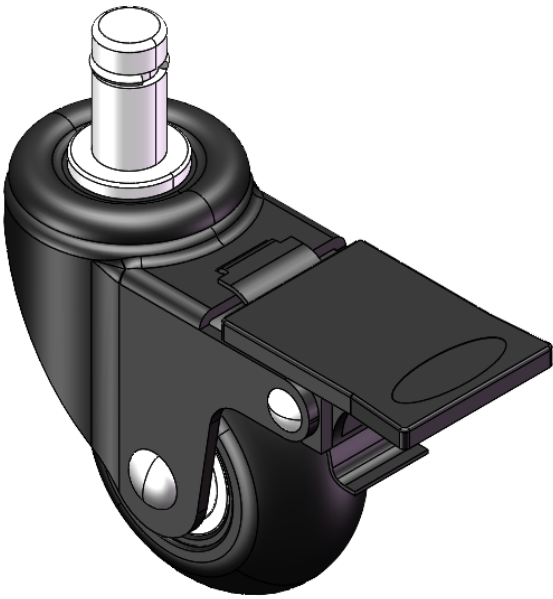

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	1-15/16 "
Wheel Width	15/16 "
Wheel Bearing	Wheels With Ball Bearings
Diameter	3/8 "
Stem Hole Spec	7/8 "
Offset	13/16 "
Swivel Interference	5-13/16 "
Overall Height	2-9/16 "
Swivel Radius	2-15/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	66lbs
Load Capacity (Static)	99lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

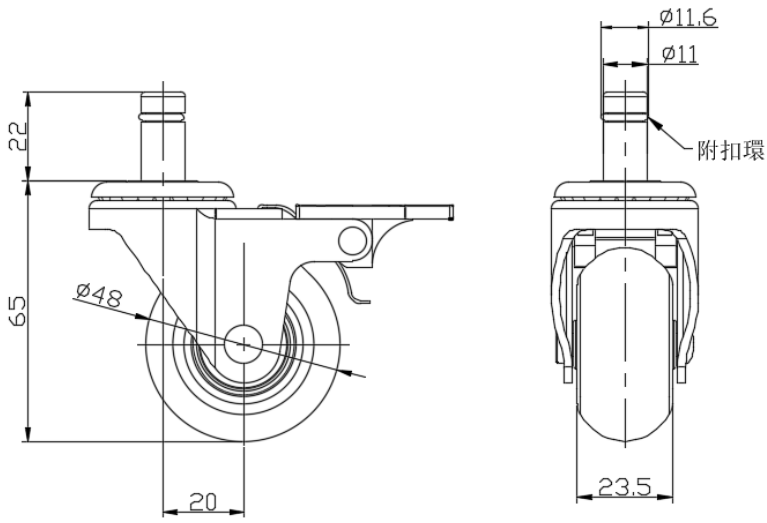

Mounting

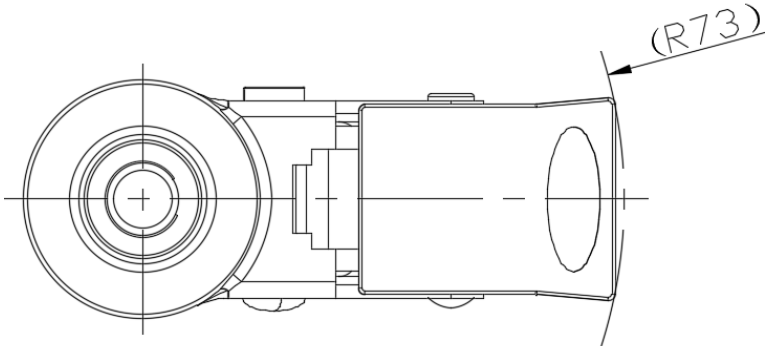

* For any deviation between metric and imperial spec, please refer to the metric spec.