

1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)




Yoyo Wheel (light dark gray) Wheel Diameter x Wheel Width 65 x 18mm

EAN

YJ-11100250244033

Single Brake locking system and a Fork-Riveted, injection-molded Fork, reinforced Polypropylene Fork with Fork-mount (3T) Mounting Type system Polypropylene (PP) Wheel Center, polyvinyl chloride (PVC) tread White-dark gray, wheel - Plain Bearing.

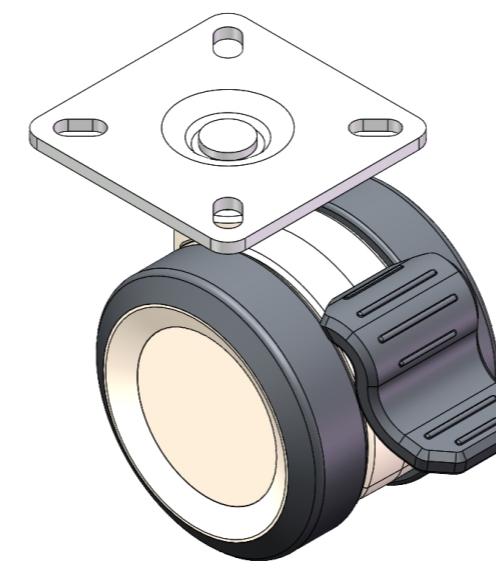

Wheel Tread: PVC polyvinyl chloride
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|--------------------------------|
| Wheel Diameter | 65mm |
| Wheel Width | 59mm |
| Wheel Bearing | Wheel With Plain Bearing |
| Plate Size | 60 x 60mm |
| Bolt Hole Spacing | 42.5 x 42.5mm |
| Plate Hole | 11 x 6mm |
| Offset | 20mm |
| Swivel Interference | 152mm |
| Overall Height | 81.6mm |
| Swivel Radius | 76mm |
| Hardness Of Tread | 95±5° Shore A |
| Load Capacity (Dynamic) | 45kgs |
| Load Capacity (Static) | 67.5kgs |
| Temperature | -20°C to +60°C |
| Fork Type | Swivel Caster With Wheel Brake |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.27kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

Dimensions

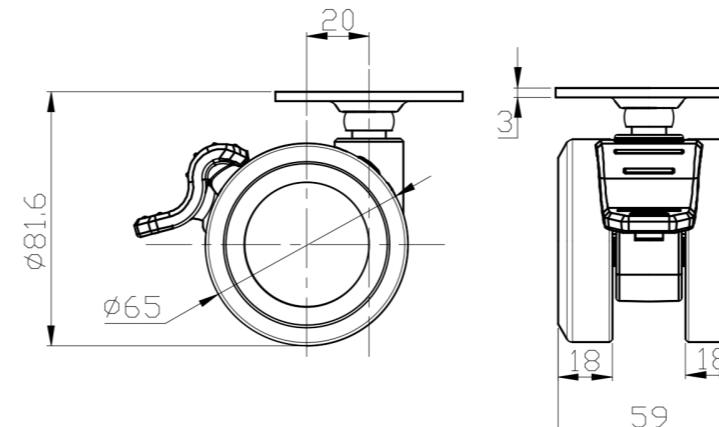

Mounting

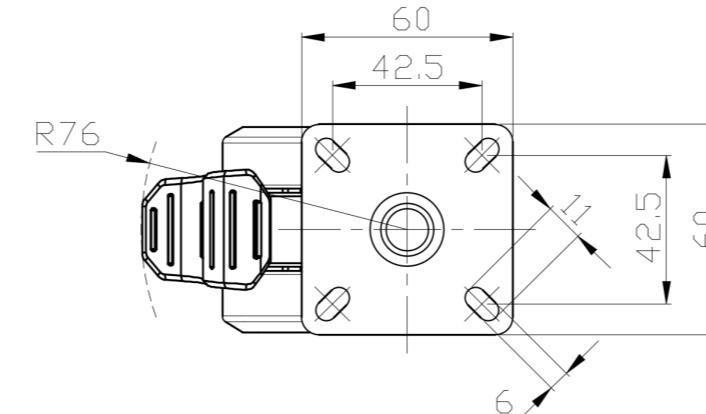

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com