

1110-YOYO YOYO Series-Light Duty Twin  
Wheel Caster Series (All Plastic)

Yoyo Wheel (light dark gray) Wheel Diameter x Wheel Width 65 x 18mm


EAN

YJ-11100250246033

Single Brake locking system, thread-Riveted injection-molded Fork (M8-P1.75). reinforced Polypropylene Fork, Mounting Type - Threaded Stem. Polypropylene (PP) core, polyvinyl chloride (PVC) tread. White-dark gray, wheel - Plain Bearing.

Wheel Tread: PVC polyvinyl chloride  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

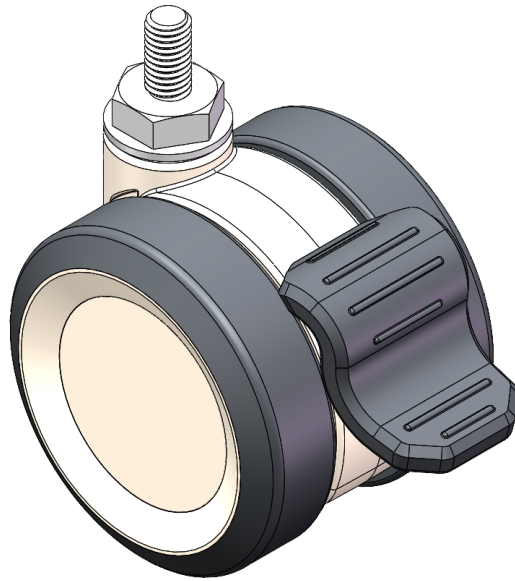

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 65mm                           |
| Wheel Width                                                            | 59mm                           |
| Wheel Bearing                                                          | Wheel With Plain Bearing       |
| Threaded Stem                                                          | M8-P1.75                       |
| Threaded Size                                                          | 15mm                           |
| Offset                                                                 | 20mm                           |
| Swivel Interference                                                    | 152mm                          |
| Overall Height                                                         | 75mm                           |
| Swivel Radius                                                          | 76mm                           |
| Hardness Of Tread                                                      | 95±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 45kgs                          |
| Load Capacity (Static)                                                 | 67.5kgs                        |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Wheel Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.21kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | • • • • • |
| Operating Noise            | • • • • • |
| Floor Surface Preservation | • • • • • |

Dimensions

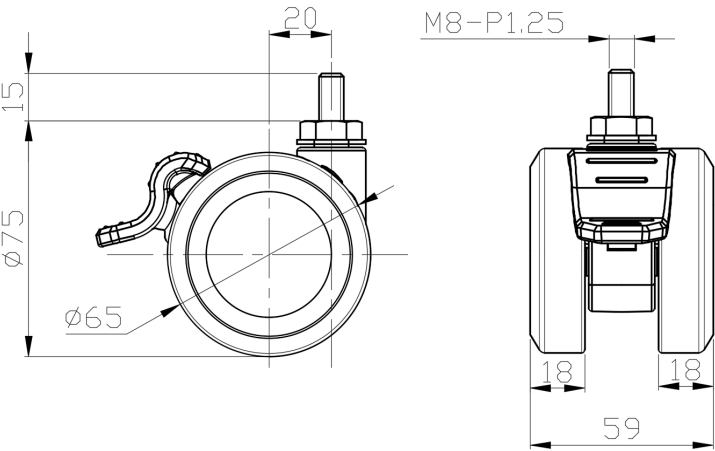

Mounting

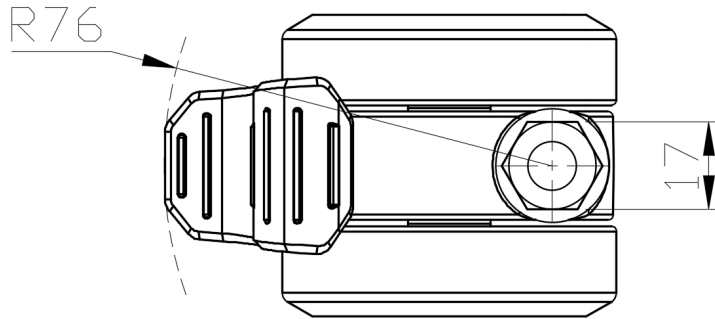

\* For any deviation between metric and imperial spec, please refer to the metric spec.