

1110-2 Light Duty Wire & Shelving/Display Series



PU (black transparent) Wheel Diameter × Wheel Width 64 × 23.5mm


EAN

YJ-11100250955014

Swivel Caster, thread-Riveted Stamping Fork—M8-P1.25
Surface electroplating, Mounting Type - Threaded Stem
Polypropylene core, High Quality Polyurethane Wheel Tread
Translucent black, Bearing—Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

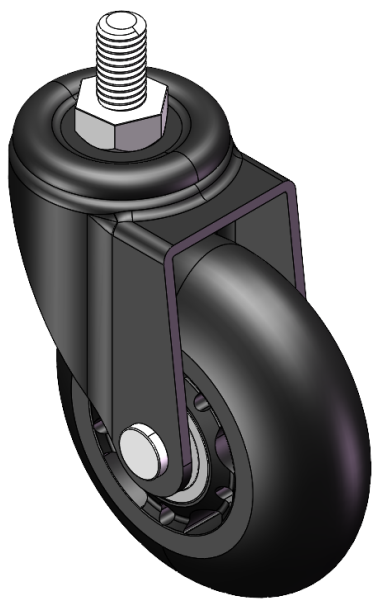

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	64mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M8-P1.25
Threaded Size	15mm
Offset	21mm
Swivel Interference	106mm
Overall Height	83mm
Swivel Radius	53mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.18kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

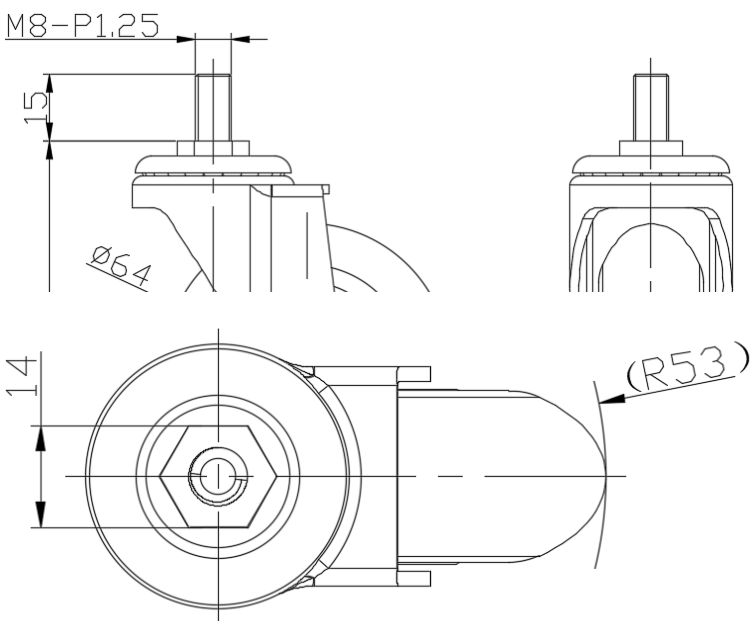

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.