

1110-2 Light Duty Wire & Shelving/Display Series



PU (black transparent) Wheel Diameter × Wheel Width 64 × 23.5mm


EAN

YJ-11100250956014

Caster with a single-brake With locking system. UNC-Riveted Stamping bracket—M8-P1.25.
Surface electroplating, Mounting Type - Threaded Stem.
Polypropylene core, High Quality Polyurethane Wheel Tread.
Transparent black finish. Bearings—Ball Bearings.

Wheel surface: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

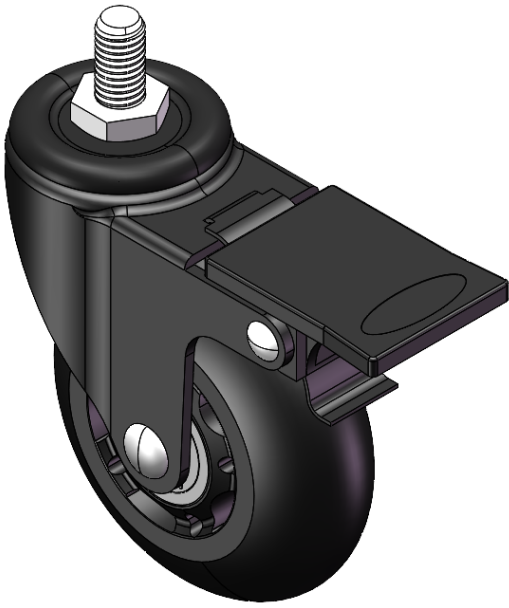

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	64mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M8-P1.25
Threaded Size	15mm
Offset	21mm
Swivel Interference	146mm
Overall Height	83mm
Swivel Radius	73mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.21kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

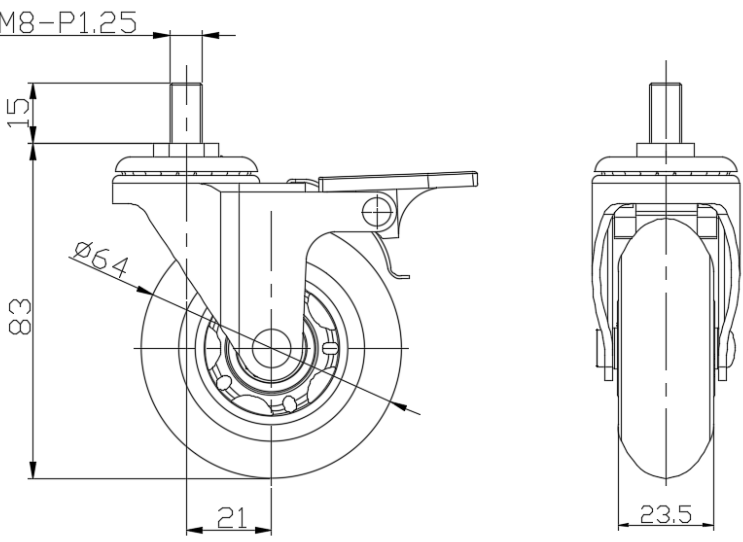

Mounting

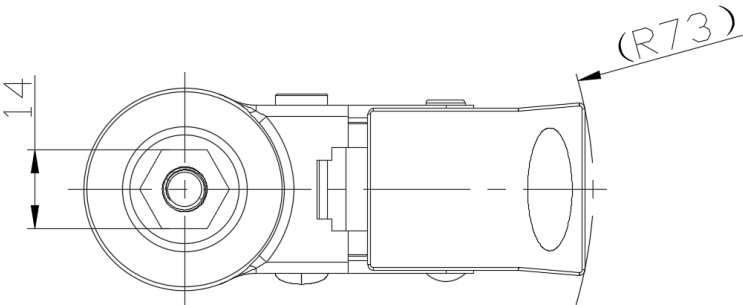

* For any deviation between metric and imperial spec, please refer to the metric spec.