

## 1110-2 Light Duty Wire & Shelving/Display Series

PPR Wheel (Black-Black Flat) Wheel Diameter × Wheel Width 75×21mm


EAN

YJ-11100300265413

Portable Casters, Threaded Stem Stamping Fork—3/8"-16 teeth  
 Electroplated surface, Mounting Type - Threaded Stem device  
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced  
 Polypropylene Rubber (TPR) Wheel Tread  
 Black, Bearing—Ball Bearings.

Wheel core: Impact-resistant polypropylene  
 Wheel tread: Thermoplastic rubber elastomer (TPR)

Drawings are for reference only and may differ from the product

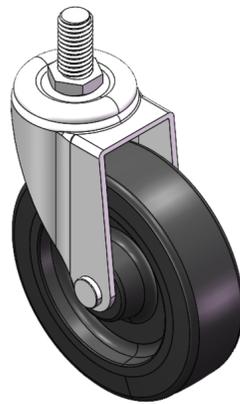

Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter	75mm
Wheel Width	21mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8" -16牙
Threaded Length	19mm
Offset	21mm
Swivel Interference	118mm
Overall Height	97mm
Swivel Radius	59mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.20kgs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

### Dimensions

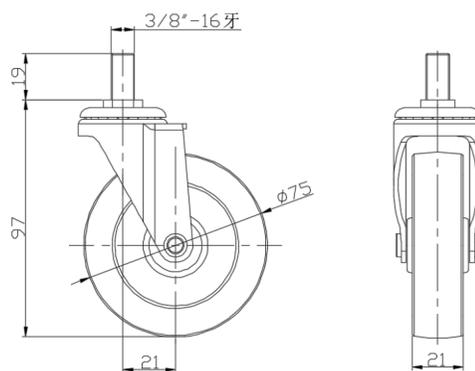

### Mounting

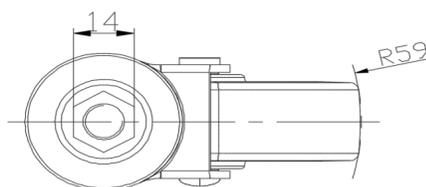

\* For any deviation between metric and imperial spec, please refer to the metric spec.