

1110-2 Light Duty Wire & Shelving/Display Series

PPR Wheel (Black-Black Flat) Wheel Diameter × Wheel Width 75×21mm


EAN

YJ-11100300265413

Portable Casters, Threaded Stem Stamping Fork—3/8"-16 teeth
 Electroplated surface, Mounting Type - Threaded Stem device
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
 Black, Bearing—Ball Bearings.

Wheel core: Impact-resistant polypropylene
 Wheel tread: Thermoplastic rubber elastomer (TPR)

Drawings are for reference only and may differ from the product

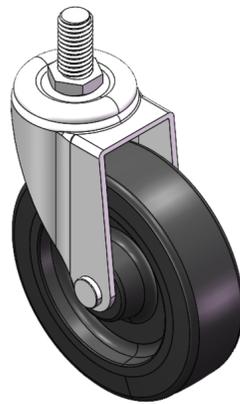

Picture may differ from original product

Technical Data


Imperial Metric

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 3 " |
| Wheel Width | 7/8 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Threaded Stem | 3/8 " -16牙 |
| Threaded Length | 3/4 " |
| Offset | 7/8 " |
| Swivel Interference | 4-11/16 " |
| Overall Height | 3-7/8 " |
| Swivel Radius | 2-3/8 " |
| Hardness Of Tread | 82±5° Shore A |
| Load Capacity (Dynamic) | 88lbs |
| Load Capacity (Static) | 132lbs |
| Temperature | -4°F to +140°F |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.4lbs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

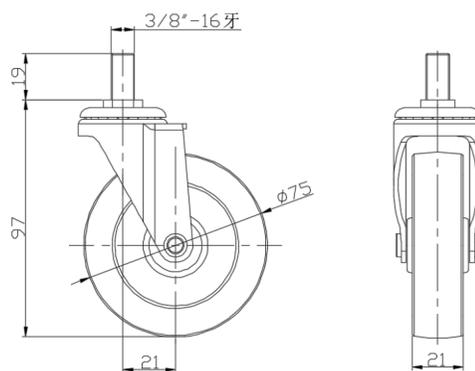

Mounting

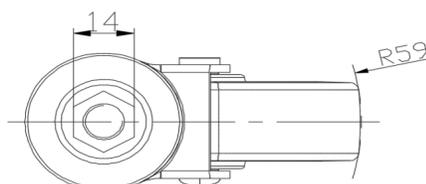

* For any deviation between metric and imperial spec, please refer to the metric spec.