

1110-2 Light Duty Wire & Shelving/Display Series

PPR Wheel (Black-Black Flat) Wheel Diameter × Wheel Width 75×21mm


EAN

YJ-11100300267413

Portable Casters, mortise-and-tenon Stamping Fork—Ø11×50L
 Zine-Plated surface, mortise-and-tenon Mounting Type device with copper buckle
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
 Polypropylene Rubber (TPR) Wheel Tread
 Black, Bearing—Ball Bearings.

Wheel core: Impact-resistant polypropylene
 Wheel tread: Thermoplastic rubber elastomer (TPR)

Drawings are for reference only and may differ from the product

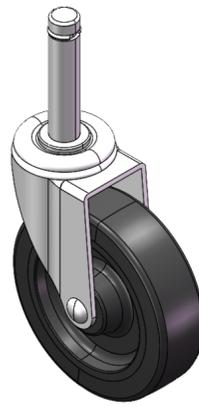

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	21mm
Wheel Bearing	Wheels With Ball Bearings
Stem Diameter	11mm
Stem Length	50mm
Offset	21mm
Swivel Interference	118mm
Overall Height	94mm
Swivel Radius	59mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	40kgs
Load Capacity (Static)	60kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.23kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

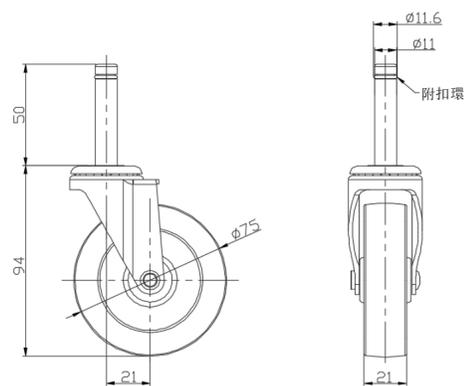

Mounting

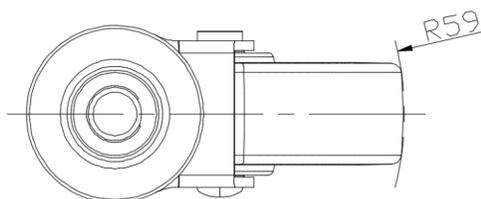

* For any deviation between metric and imperial spec, please refer to the metric spec.