

## 1110-2 Light Duty Wire & Shelving/Display Series

PPR Wheel (Black-Black Flat) Wheel Diameter × Wheel Width 75×21mm


EAN

YJ-11100300267413

Portable Casters, mortise-and-tenon Stamping Fork—Ø11x50L  
 Zine-Plated surface, mortise-and-tenon Mounting Type device with copper buckle  
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced  
 Polypropylene Rubber (TPR) Wheel Tread  
 Black, Bearing—Ball Bearings.

Wheel core: Impact-resistant polypropylene  
 Wheel tread: Thermoplastic rubber elastomer (TPR)

Drawings are for reference only and may differ from the product

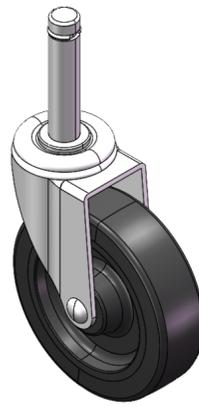

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	3 "
Wheel Width	7/8 "
Wheel Bearing	Wheels With Ball Bearings
Stem Diameter	3/8 "
Stem Length	2 "
Offset	7/8 "
Swivel Interference	4-11/16 "
Overall Height	3-3/4 "
Swivel Radius	2-3/8 "
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	88lbs
Load Capacity (Static)	132lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.5lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

### Dimensions

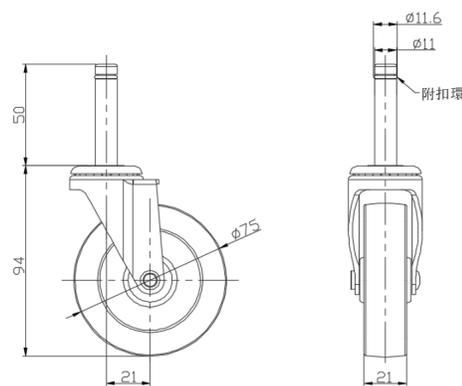

### Mounting

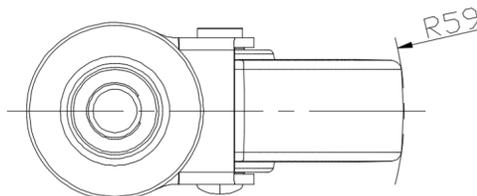

\* For any deviation between metric and imperial spec, please refer to the metric spec.