1110-2 Light Duty Wire & Shelving/Display Series

Dersheng Casters Keep Rolling

PU (Black Transparent) Wheel Diameter × Wheel Width 76 × 23.5mm

EAN

YJ-11100300955014

Swivel Caster, thread-Riveted Stamping Fork—M8-P1.25 Surface electroplating, Mounting Type - Threaded Stem Polypropylene core, High Quality Polyurethane tread Translucent black, Bearing—Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 76mm
Wheel Width 23.5mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.25
Threaded Size 15mm
Offset 21mm
Swivel Interference 118mm
Overall Height 97mm
Swivel Radius 59mm

Hardness Of Tread 80±5° Shore A
Load Capacity (Dynamic) 50kgs

Load Capacity (Dynamic) 50kgs
Load Capacity (Static) 75kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.22kgs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise • •

Floor Surface Preservation • • • • •

Dimensions

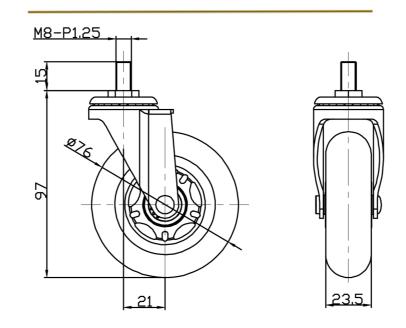

Mounting

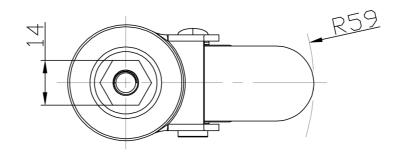

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.