

1110-2 Light Duty Wire & Shelving/Display Series



PU (Black Transparent) Wheel Diameter × Wheel Width 76 × 23.5mm


EAN

YJ-11100300958014

Casters with a Wheel Brake Locking system. Stamped, Riveted Fork—Ø11x22L. E-Coat Finish surface, snap-on Mounting Type mechanism with brass buckle. Polypropylene core, High Quality Polyurethane tread. Translucent black finish. Bearing—Ball Bearing.

Wheel Tread: high quality polyurethane
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

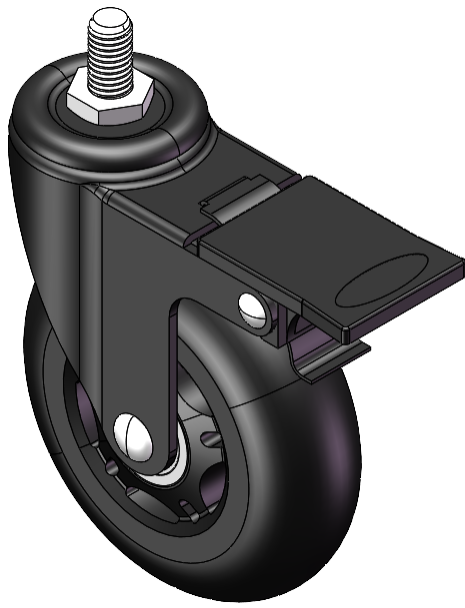

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	76mm
Wheel Width	23.5mm
Wheel Bearing	Wheels With Ball Bearings
Diameter	11mm
Stem Hole Spec	22mm
Offset	21mm
Swivel Interference	154mm
Overall Height	97mm
Swivel Radius	77mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	50kgs
Load Capacity (Static)	75kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.26kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

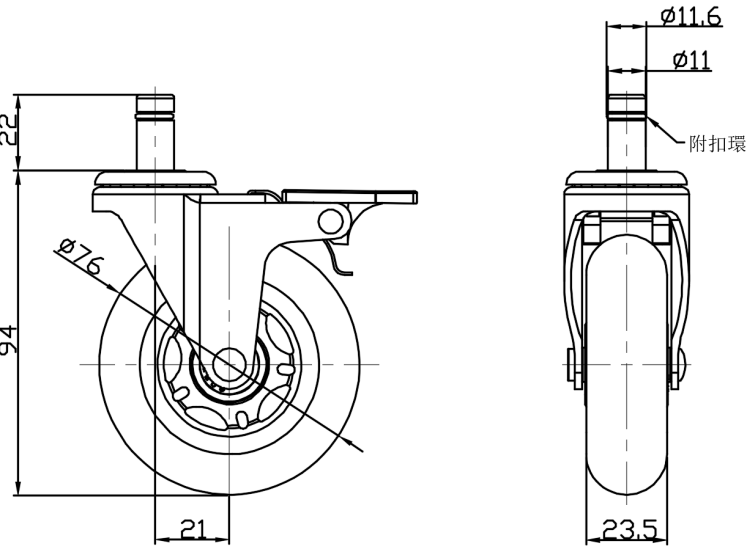

Mounting

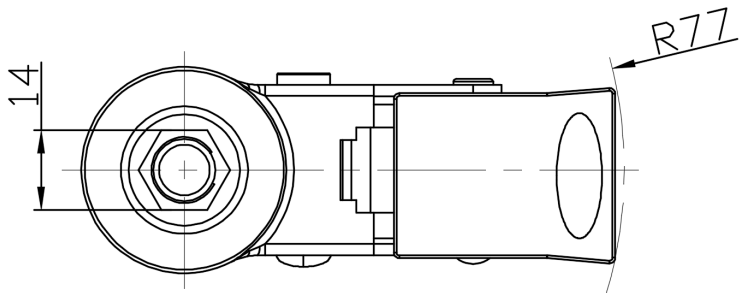

* For any deviation between metric and imperial spec, please refer to the metric spec.