# 1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Yoyo Wheel (black dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400246013

Single Brake locking system, thread-Riveted injection-molded Fork (M8-P1.75). reinforced Polypropylene Fork, Mounting Type - Threaded Stem. Polypropylene (PP) Wheel Center, polyvinyl chloride (PVC) tread. Dark gray, Bearing: Ball Bearing.

Wheel Tread: PVC polyvinyl chloride Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 68mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.75

Threaded Size 15mm

Offset 32mm

Swivel Interference 212mm

Overall Height 108.5mm

Swivel Radius 106mm

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Wheel Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.51kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

### **Dimensions**

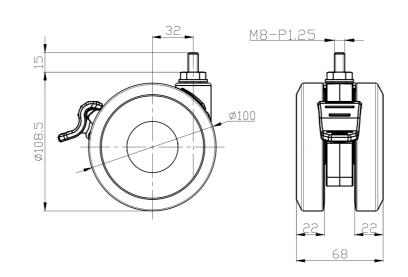

## Mounting

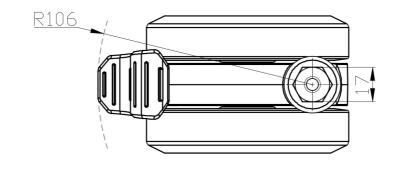

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.