




1111 Institutional Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 30mm

EAN

YJ-11110300061013

Rigid Caster, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Extended control lever surface, Mounting Type - Top Plate Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheel - Plain Bearing

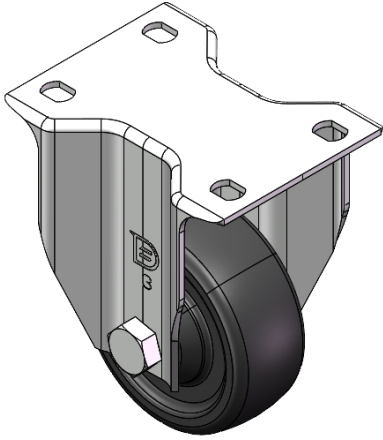

Wheel Tread: high quality elastic rubber  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 75mm                      |
| Wheel Width                                                            | 30mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 96 x 75mm                 |
| Bolt Hole Spacing                                                      | 75 x 45mm                 |
| Plate Hole                                                             | 11.1 x 8.6mm              |
| Overall Height                                                         | 112mm                     |
| Hardness Of Tread                                                      | 80±5° Shore A             |
| Load Capacity (Dynamic)                                                | 70kgs                     |
| Load Capacity (Static)                                                 | 105kgs                    |
| Temperature                                                            | -20°C to +120°C           |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.41kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |             |
|----------------------------|-------------|
| Rolling Resistance         | ● ● ● ○ ○   |
| Operating Noise            | ● ● ● ● ○   |
| Floor Surface Preservation | ● ● ● ● ● ○ |

Dimensions

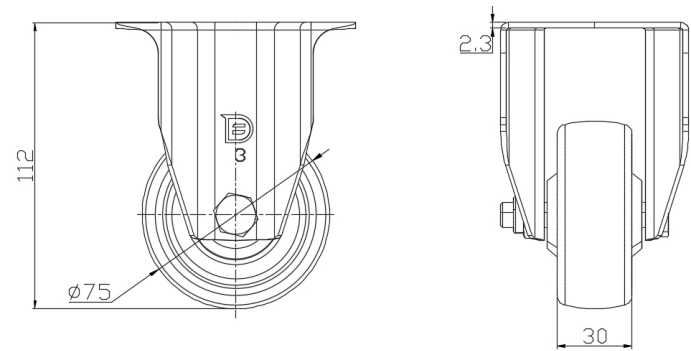

Mounting

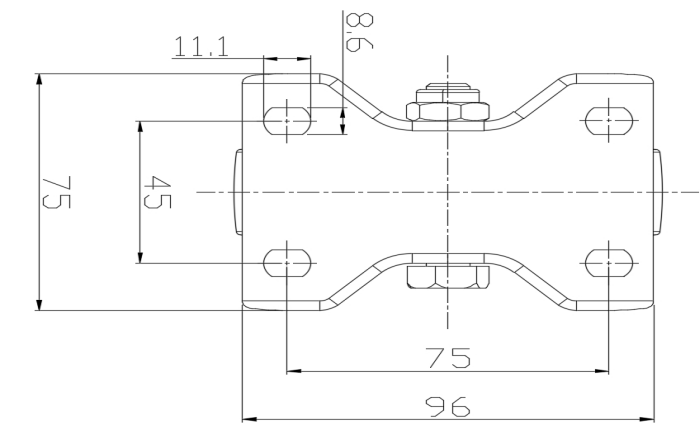

\* For any deviation between metric and imperial spec, please refer to the metric spec.