



1111 Institutional Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11110300064023

Castors with Side Brake locking system. Top Plate Riveted Stamping Fork - High-grade holes Surface Zine-Plated, Mounting Type - Top Plate Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheels-Plain Bearing

Wheel Tread: high quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

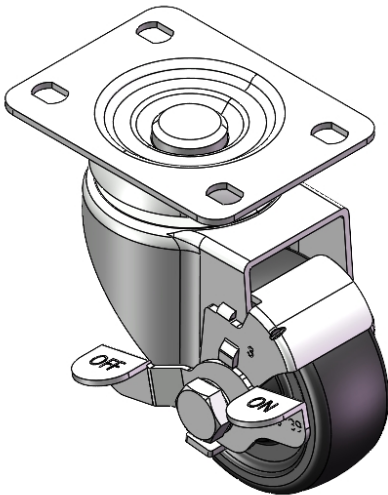

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	30mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	95 x 72.5mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	11.3 x 8.8mm
Offset	37mm
Swivel Interference	158mm
Overall Height	112mm
Swivel Radius	79mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.77kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

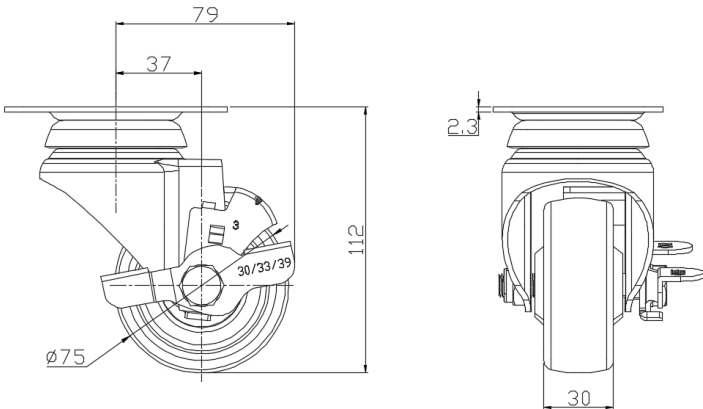

Mounting

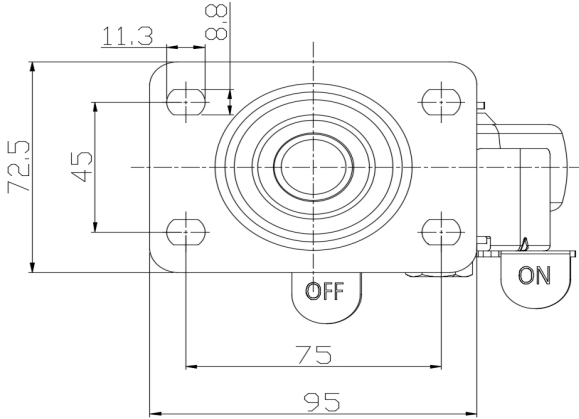

* For any deviation between metric and imperial spec, please refer to the metric spec.