



1111 Institutional Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11110300066083

Side Brake Locking system Threaded Stamping Fork— 1/2"-13 Extended control lever surface, Mounting Type - Threaded Stem Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheels—Plain Bearing

Wheel Tread: high quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

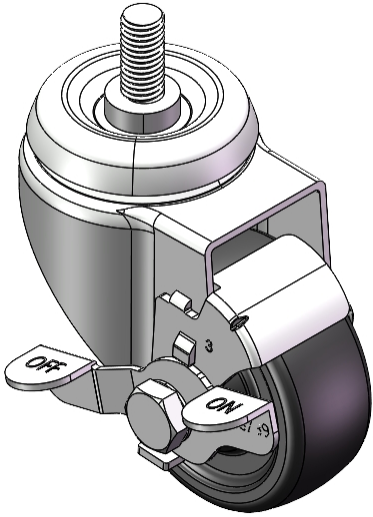

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-3/16 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	1/2 " -13
Threaded Size	1 "
Offset	1-1/2 "
Swivel Interference	6-5/16 "
Overall Height	4-5/16 "
Swivel Radius	3-1/8 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

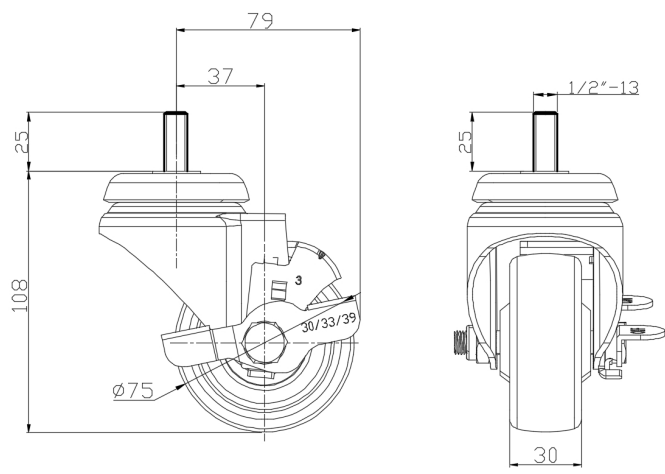

Mounting

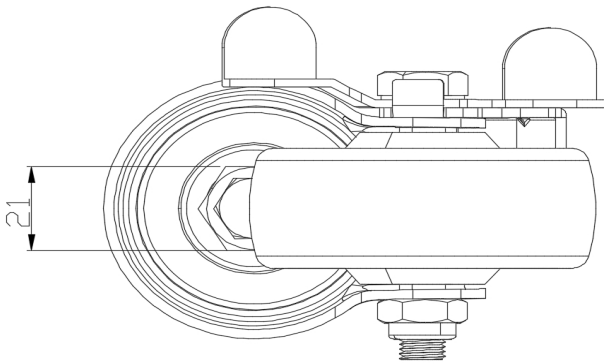

* For any deviation between metric and imperial spec, please refer to the metric spec.