1111 Institutional Caster Series

Dersheng Casters Keep Rolling

PP (black) Wheel Diameter x Wheel Width 75 x 32mm


EAN

YJ-11110300295023

Swivel Caster, thread-Riveted Stamping Fork—3/8"-16 Extended control lever surface, Mounting Type - Threaded Stem device Polypropylene Wheel Center and Wheel Tread Black, wheel—Anti-thread wheel cover.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 32mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8"-16

Threaded Size 25mm

Offset 37mm

Swivel Interference 150mm

Overall Height 112mm

Swivel Radius 75mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -10°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.54kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • 0 0


Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions





Mounting

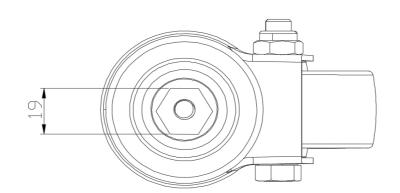

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.