## 1111 Institutional Caster Series

Dersheng Casters Keep Rolling

PP (black) Wheel Diameter x Wheel Width 75 x 32mm


EAN

#### YJ-11110300295023

Swivel Caster, thread-Riveted Stamping Fork—3/8"-16 Extended control lever surface, Mounting Type - Threaded Stem device Polypropylene Wheel Center and Wheel Tread Black, wheel—Anti-thread wheel cover.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

	Imperial	$\bigcirc$	Metric
--	----------	------------	--------

Wheel Diameter 3 "

Wheel Width 1-5/16 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8"-16

Threaded Size 1"

Offset 1-1/2"

Swivel Interference 6"

Overall Height 4-1/2"

Swivel Radius 3"

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature 14°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.2lbs

Standard ISO22883

### Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • 0 0


Floor Surface Preservation  $\bullet \bullet \circ \circ$ 

# Dimensions





# Mounting

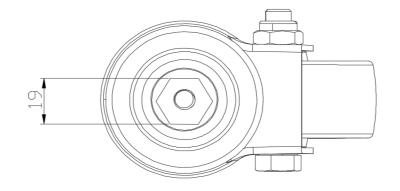

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.