1111 Institutional Caster Series

Dersheng Casters Keep Rolling

PP (black) Wheel Diameter x Wheel Width 75 x 32mm


EAN

YJ-11110300296023

Side Brake Locking system. Thread-Riveted Fork— 3/8"-16 Extended control lever surface, Mounting Type - Threaded Stem Polypropylene Wheel Center and Wheel Tread Black, wheels—Plain Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-5/16 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8 " -16

Threaded Size 1 "

Offset 1-1/2 "

Swivel Interference 6-5/16 "

Overall Height 4-1/2 "

Swivel Radius 3-1/8 "

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature 14°F to +140°F

Fork Type Swivel Caster With Side Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.4lbsStandardISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • • •


Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions





Mounting

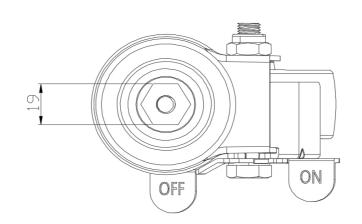

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.